
Tent image

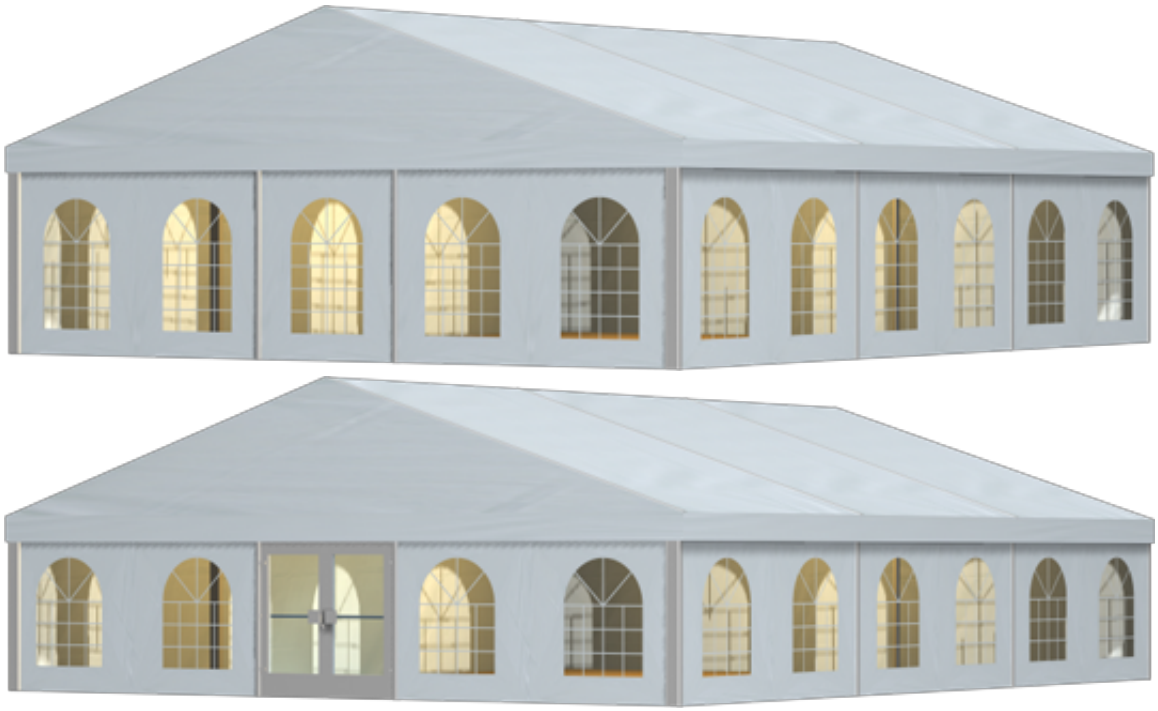

Technical data

| | |
|---|---|
| **Clear-span width** | 1200 cm |
| **Side height** | 240 cm, 300 cm |
| **Ridge height** | 460 cm, 520 cm |
| **Roof pitch** | 20° |
| **Bay distance** | 500 cm |
| **Gable uprights** | 2 gable uprights (per end) |
| **Longest component** | 660 cm |
| **Minimum tent length** | 1000 cm |
| **Maximum tent length** | No limit |
| **Main profile** | 160 mm x 100 mm x 3 mm |
| **Eave / corner connection** | Slide connection |
| **Max. allowed wind speed to DIN** | 100 km/h |
| **Wind Load** | 0.5 kN/m² |
| **Extension / lean-to options** | Extension (max. span 300 cm and 4 bays, located anywhere, not both sides) |
| **Flooring options** | Woodenfloor with timber or steel sub-construction<br>Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor |
| **Cover** | RÖDER No. 1: PVC-coated polyester textile, flame |

retardant to DIN 4102 B1, M2

**Special design**

By using compactfloor anchoring can be omitted

Tent top and side view image

