


Tent image

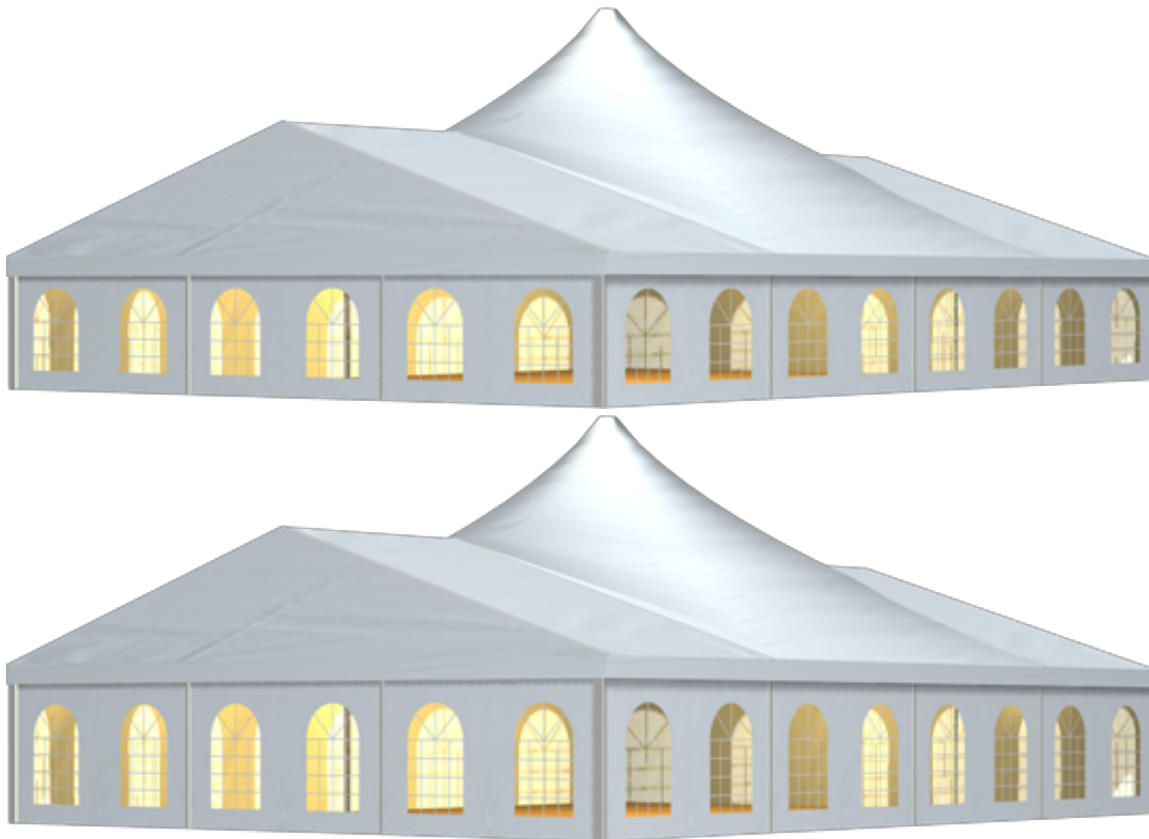

Technical data

Clear-span width	1500 cm
Side height	240 cm, 300 cm
Ridge height	480 cm, 540 cm
Highest point	811 cm, 868 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	2 gable uprights (per end)
Longest component	800 cm
Minimum tent length	3000 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 3 mm
Eave / corner connection	Slide connection
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m ²
Extension / lean-to options	Extension (max. span 400 cm, located anywhere, both sides, any length) 1/2 octagonal at gable end
Flooring options	Woodenfloor with timber or steel sub-construction

Cover

Aluminium cassettefloor with plywood or full
 aluminiumboards Compactfloor

Special design

RÖDER No. 1: PVC-coated polyester textile, flame
 retardant to DIN 4102 B1, M2

Portal beams can be used in place of cross struts By
 using compactfloor anchoring can be omitted

Tent top and side view image

