
Tent image

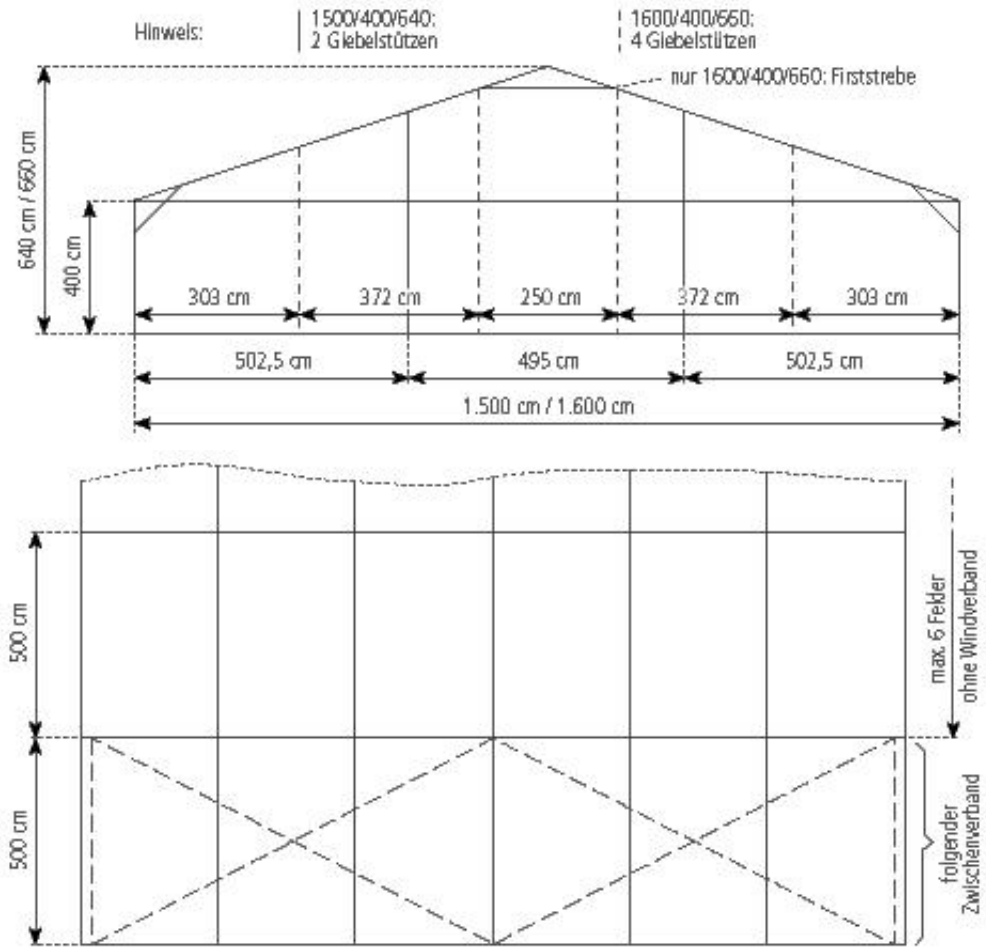

Technical data

Clear-span width	1600 cm
Side height	400 cm
Ridge height	660 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	4 gable uprights (per end)
Longest component	850 cm
Minimum tent length	1500 cm
Maximum tent length	No limit
Eave / corner connection	Twin-pin connection with corner and ridge strut
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m²
Extension / lean-to options	none
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	Portal beams can be used in place of cross struts

Tent top and side view image


Hinweis:
1500/400/640:
2 Giebelstützen
1600/400/660:
4 Giebelstützen
nur 1600/400/660: Firststrebe
640 cm / 660 cm
400 cm
309 cm
372 cm
250 cm
372 cm
309 cm
502,5 cm
495 cm
502,5 cm
1.500 cm / 1.600 cm
500 cm
500 cm
max. 6 Felder
ohne Windverband
folgender
Zwischenverband