
Tent image

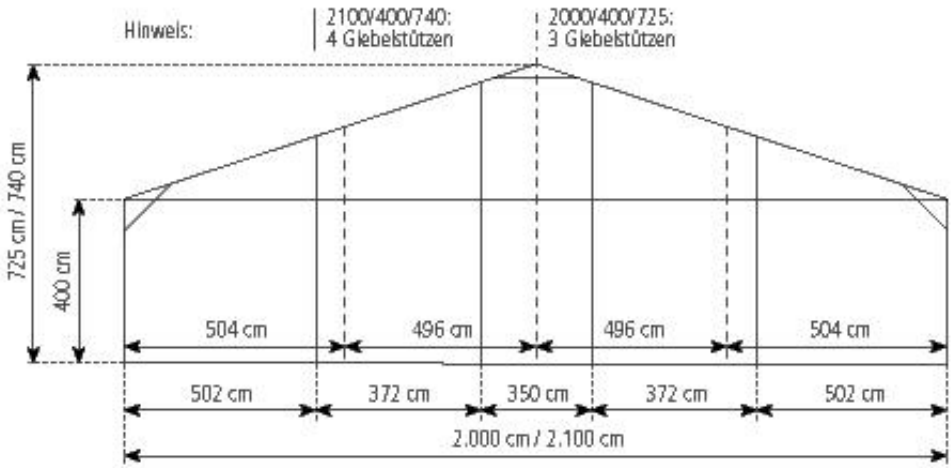


Technical data

Clear-span width	2100 cm
Side height	400 cm
Ridge height	740 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	4 gable uprights (per end)
Longest component	1130 cm
Minimum tent length	2500 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 4 mm
Eave / corner connection	Twin-pin connection with corner and ridge strut
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m²
Extension / lean-to options	none
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image


Hinweis:
2100/400/740:
4 Giebelstützen
2000/400/725:
3 Giebelstützen
725 cm / 740 cm
400 cm
504 cm
496 cm
496 cm
504 cm
502 cm
372 cm
350 cm
372 cm
502 cm
2.000 cm / 2.100 cm

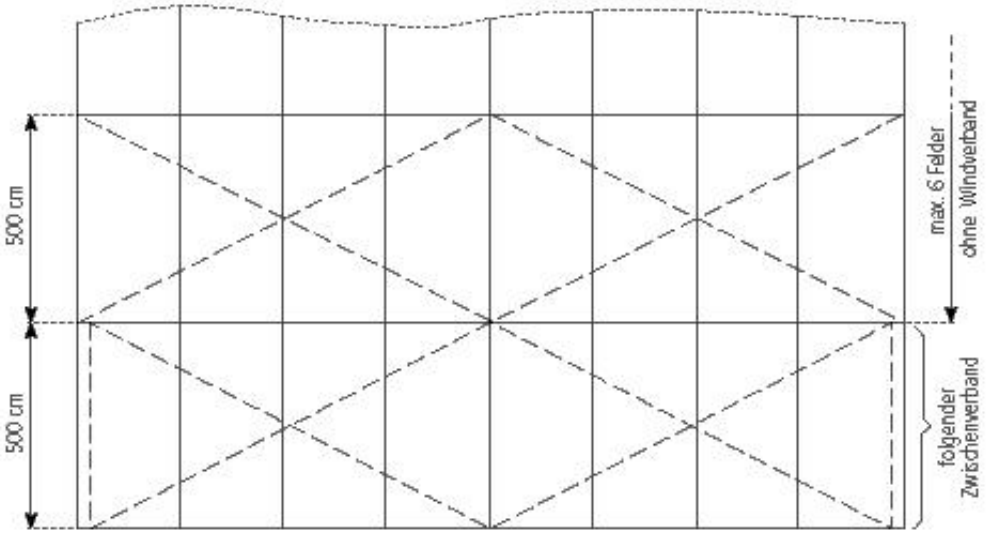
500 cm
500 cm
max. 6 Felder
ohne Windverband
folgender
Zwischenverband