

Tent image

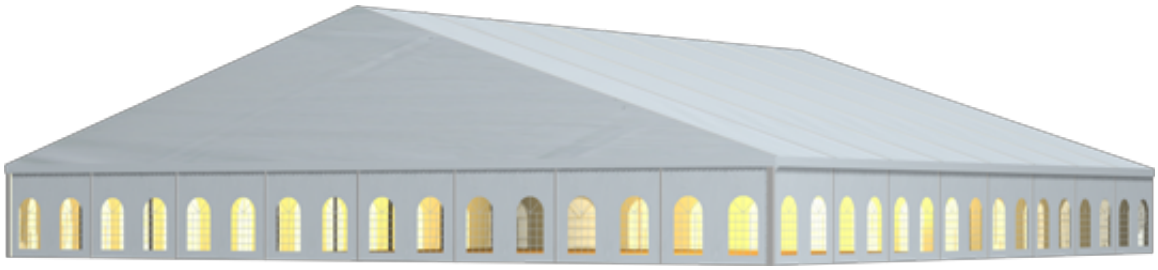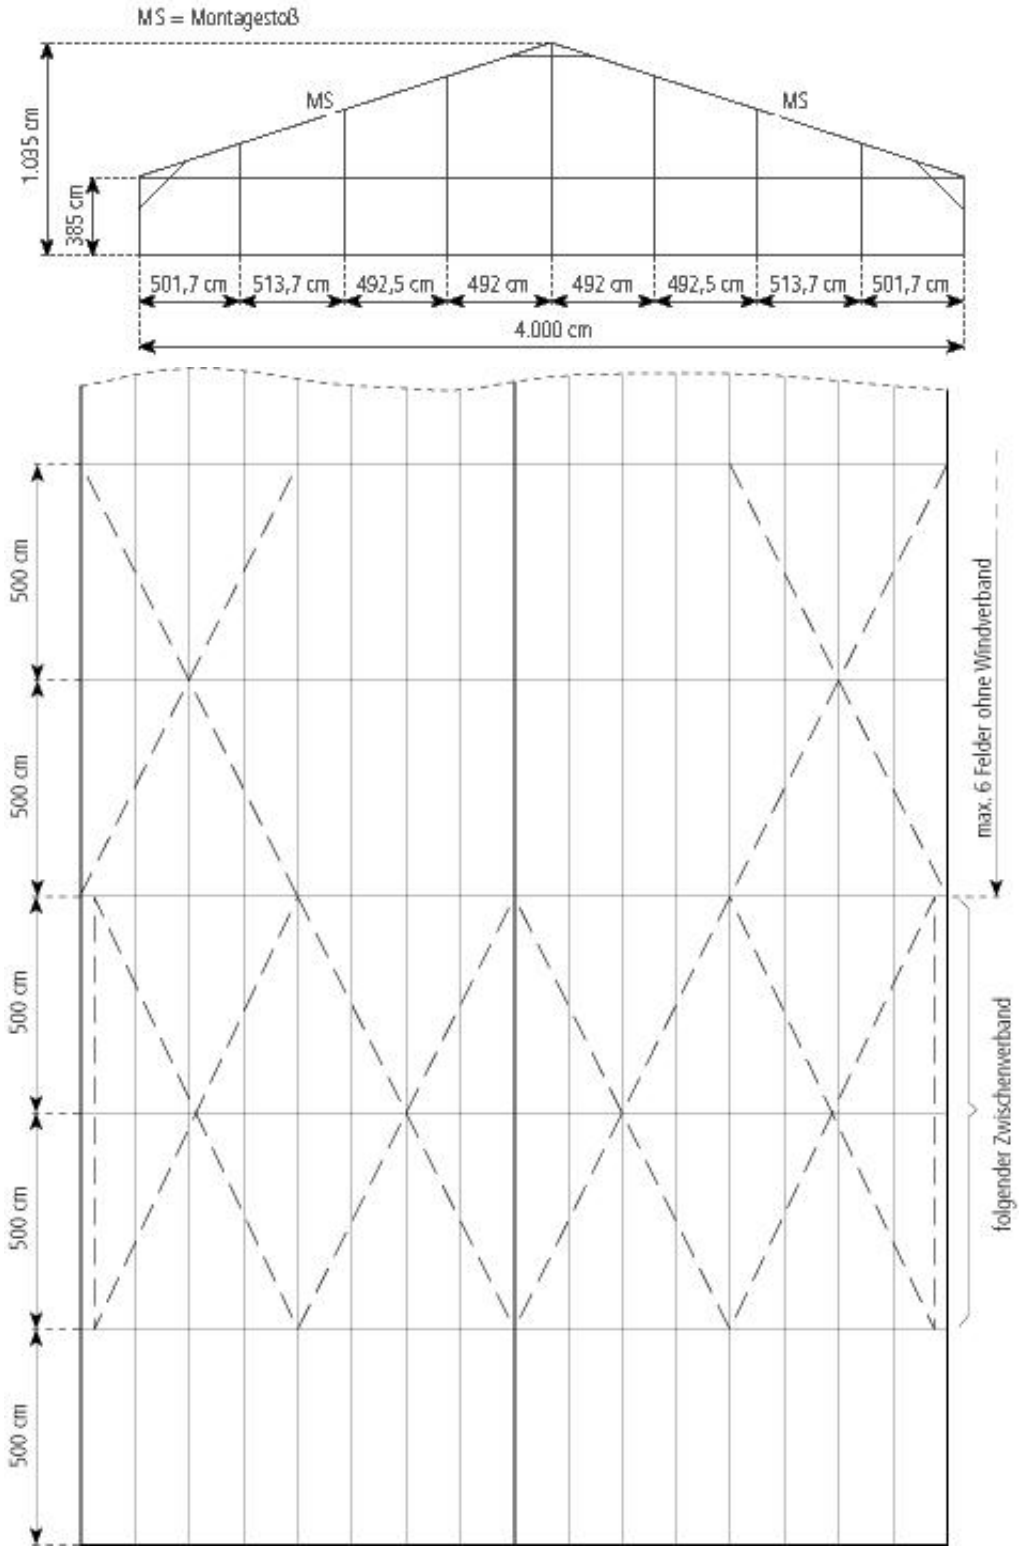

Technical data

Clear-span width	4000 cm
Side height	385 cm
Ridge height	1035 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	7 gable uprights (per end)
Longest component	1148 cm
Minimum tent length	3000 cm
Maximum tent length	No limit
Main profile	285 mm x 124 mm x 7.5/5.2 mm
Eave / corner connection	Clevic-plate connection with corner and ridge strut
Max. allowed wind speed to DIN	130 km/h
Wind Load	0.8 kN/m²
Extension / lean-to options	none
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image


MS = Montagestoß
MS
MS
1.035 cm
385 cm
501,7 cm
513,7 cm
492,5 cm
492 cm
492 cm
492,5 cm
513,7 cm
501,7 cm
4.000 cm
500 cm
500 cm
500 cm
500 cm
500 cm
max. 6 Felder ohne Windverband
folgender Zwischenverband