

Tent image

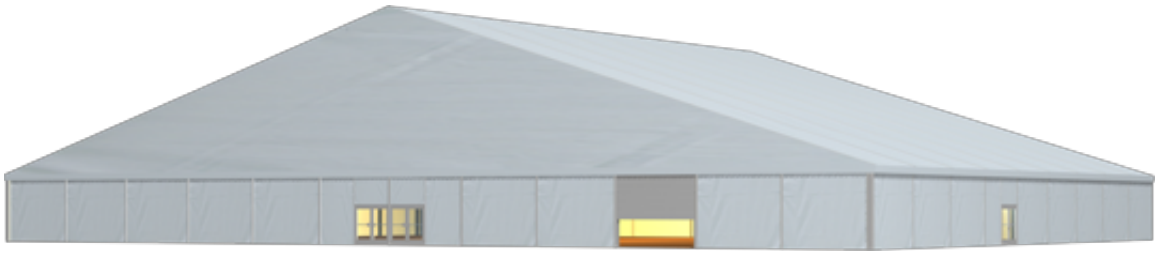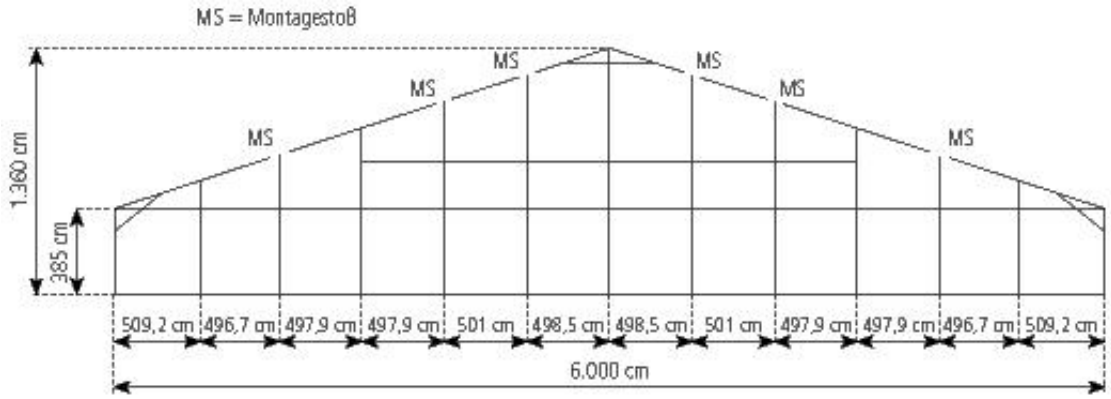


Technical data

Clear-span width	6000 cm
Side height	385 cm
Ridge height	1360 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	11 gable uprights (per end)
Longest component	1174 cm
Minimum tent length	4000 cm
Maximum tent length	No limit
Main profile	355 mm x 124 mm x 10/6 mm
Eave / corner connection	Clevic-plate connection with corner and ridge strut
Max. allowed wind speed to DIN	130 km/h
Wind Load	0.8 kN/m²
Extension / lean-to options	none
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image


MS = Montagestoß
MS
MS
MS
MS
MS
MS
1.360 cm
385 cm
509,2 cm
496,7 cm
497,9 cm
497,9 cm
501 cm
498,5 cm
498,5 cm
501 cm
497,9 cm
497,9 cm
496,7 cm
509,2 cm
6.000 cm

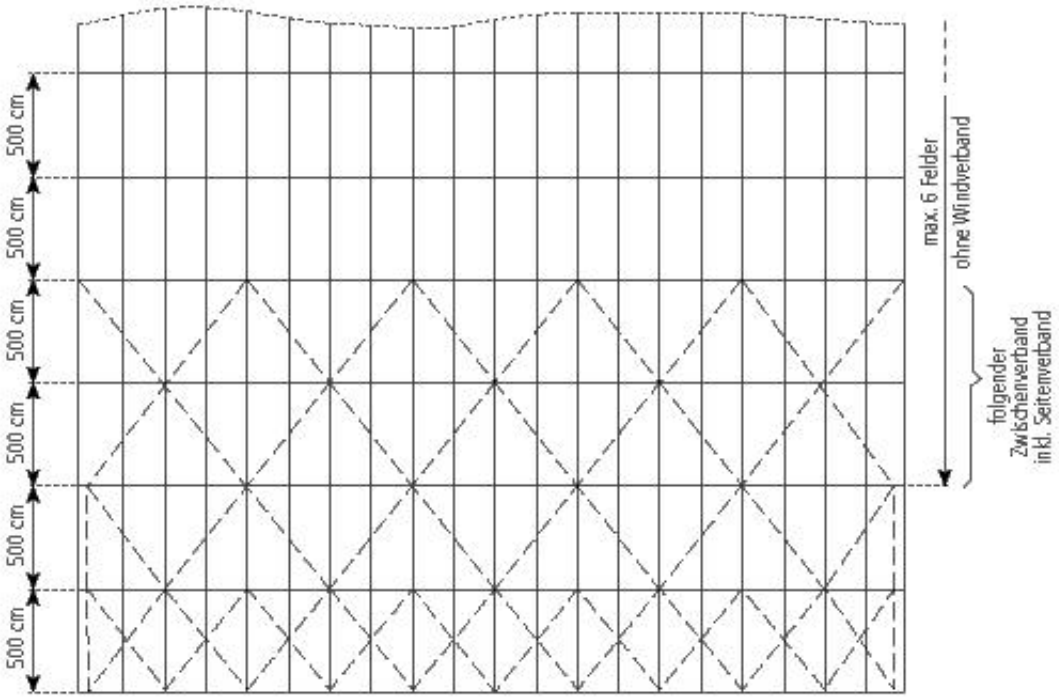
500 cm
500 cm
500 cm
500 cm
500 cm
500 cm
max. 6 Felder
ohne Windverband
folgender
Zwischenverband
inkl. Seitenverband