


Tent image

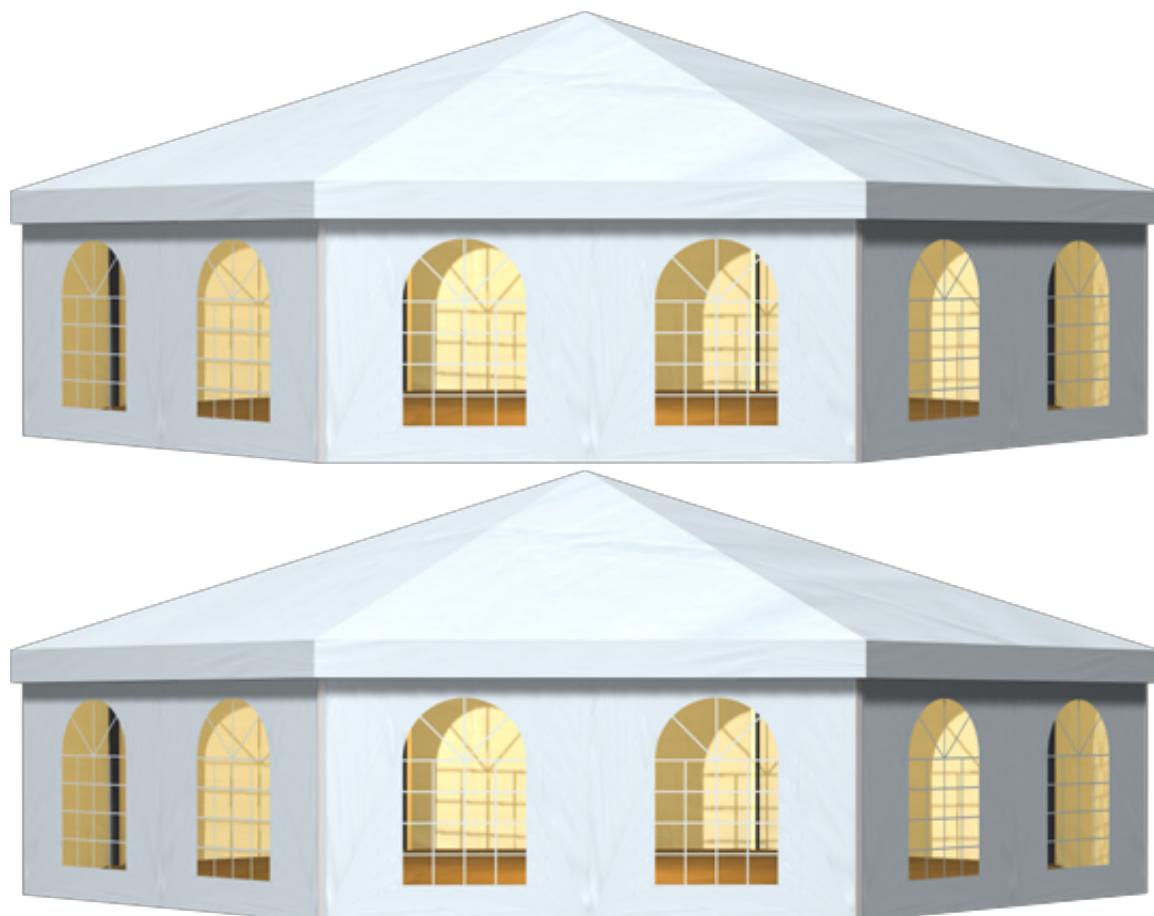

Technical data

<b>Clear-span width</b>	1500 cm
<b>Side height</b>	240 cm, 300 cm
<b>Ridge height</b>	480 cm, 540 cm
<b>Side length</b>	574 cm
<b>Roof pitch</b>	18°
<b>Longest component</b>	790 cm
<b>Main profile</b>	220 mm x 100 mm x 3 mm
<b>Eave / corner connection</b>	Slide connection
<b>Covered area</b>	159 m <sup>2</sup>
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	Can also be arranged with intermediate bays (see big tents 1500/240/480 and 1500/300/540)
<b>Flooring options</b>	Aluminium cassettfloor with plywood or full aluminiumboards Compactfloor
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame

**Special design**

retardant to DIN 4102 B1, M2  
By using compactfloor anchoring can be omitted

Tent top and side view image

