


Tent image

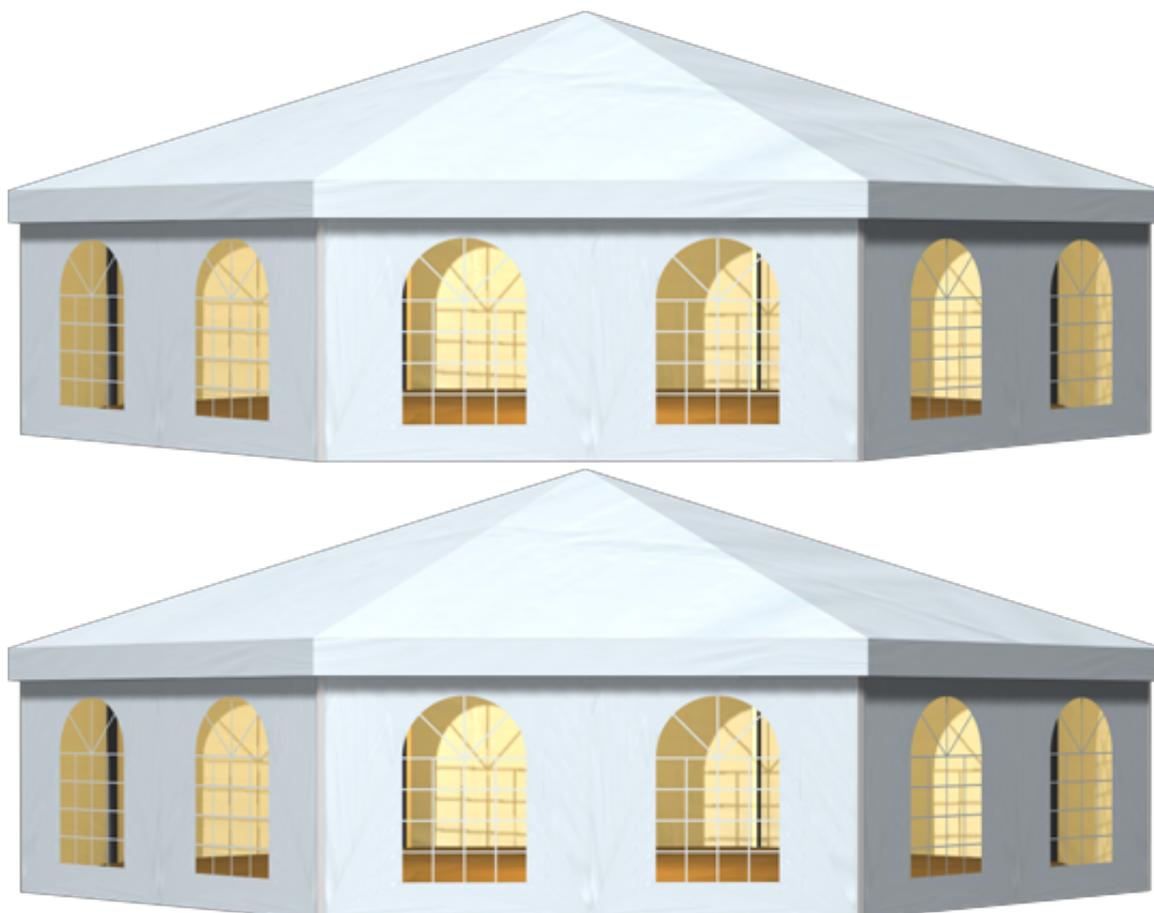

Technical data

|                                       |   |
|---------------------------------------|---|
| <b>Clear-span width</b>               | 1500 cm   |
| <b>Side height</b>                    | 240 cm, 300 cm  |
| <b>Ridge height</b>                   | 480 cm, 540 cm  |
| <b>Side length</b>                    | 574 cm  |
| <b>Roof pitch</b>                     | 18°   |
| <b>Longest component</b>              | 790 cm  |
| <b>Main profile</b>                   | 220 mm x 100 mm x 3 mm  |
| <b>Eave / corner connection</b>       | Slide connection  |
| <b>Covered area</b>                   | 159 m <sup>2</sup>  |
| <b>Max. allowed wind speed to DIN</b> | 100 km/h  |
| <b>Wind Load</b>                      | 0.5 kN/m <sup>2</sup>   |
| <b>Extension / lean-to options</b>    | Can also be arranged with intermediate bays (see big tents 1500/240/480 and 1500/300/540) |
| <b>Flooring options</b>               | Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor                 |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame  |

retardant to DIN 4102 B1, M2  
By using compactfloor anchoring can be omitted

**Special design**

Tent top and side view image

