


Tent image

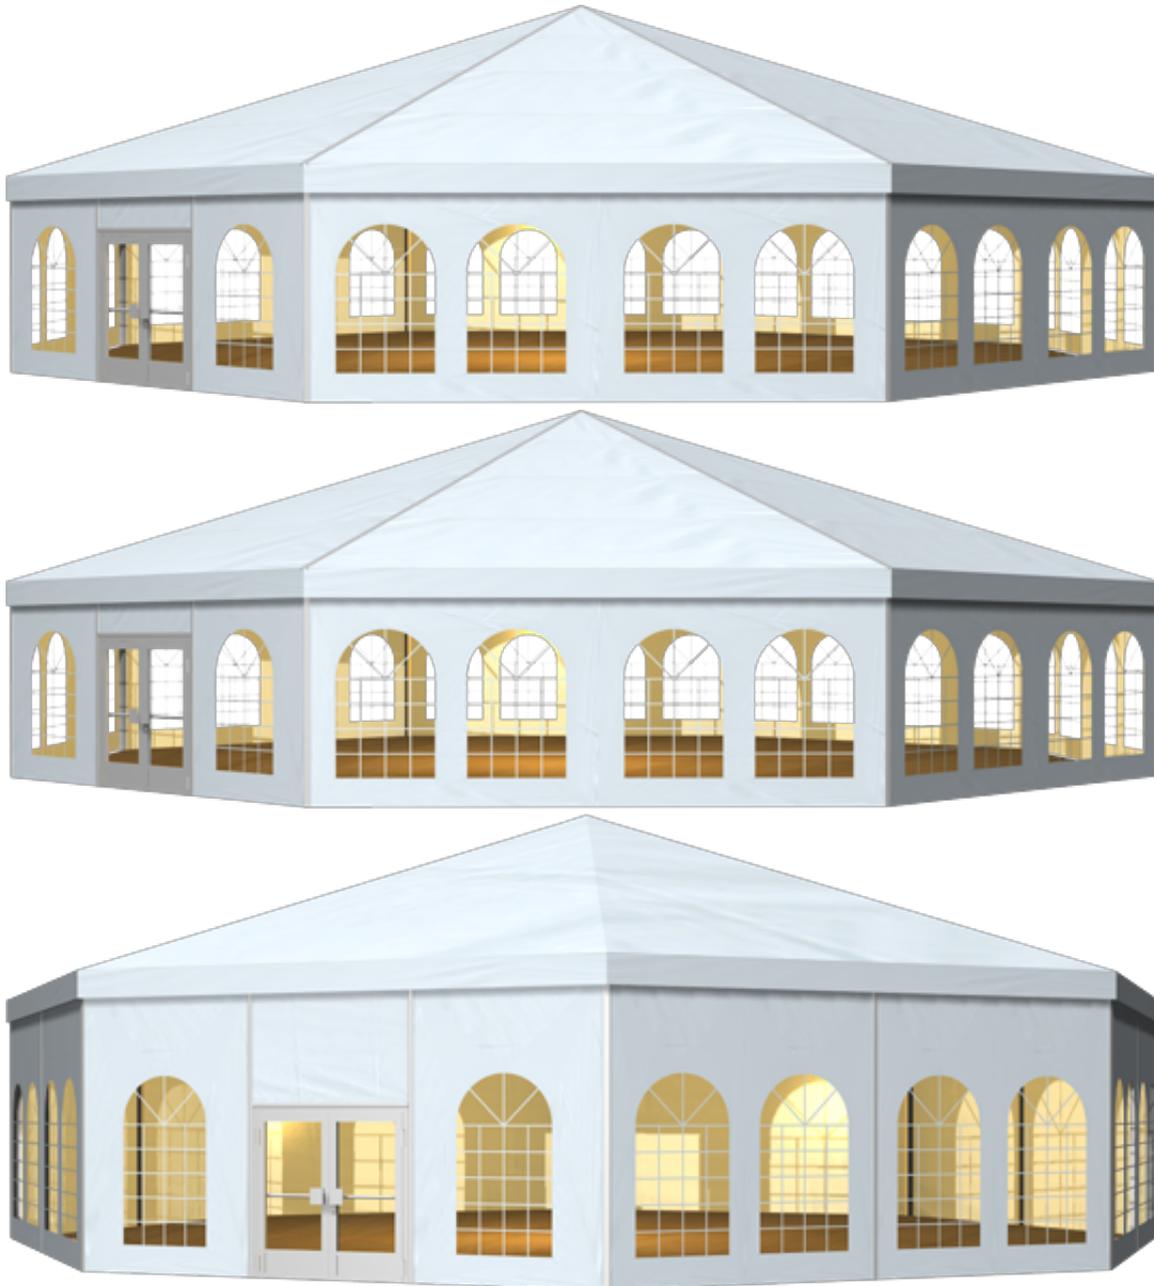

Technical data

<b>Clear-span width</b>	2000 cm
<b>Side height</b>	240 cm, 300 cm, 400 cm
<b>Ridge height</b>	565 cm, 625 cm, 725 cm
<b>Side length</b>	765 cm
<b>Roof pitch</b>	18°

<b>Longest component</b>	1060 cm
<b>Main profile</b>	220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm
<b>Eave / corner connection</b>	Slide connection with ridge strut, Twin-pin connection with corner and ridge strut
<b>Covered area</b>	282.8 m <sup>2</sup>
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	Can also be arranged with intermediate bays (see big tents 2000/240/565 and 2000/300/625), Can also be arranged with intermediate bays (see big tent 2000/240/725)
<b>Flooring options</b>	Aluminium cassettefloor with plywood or full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

