

Tent image

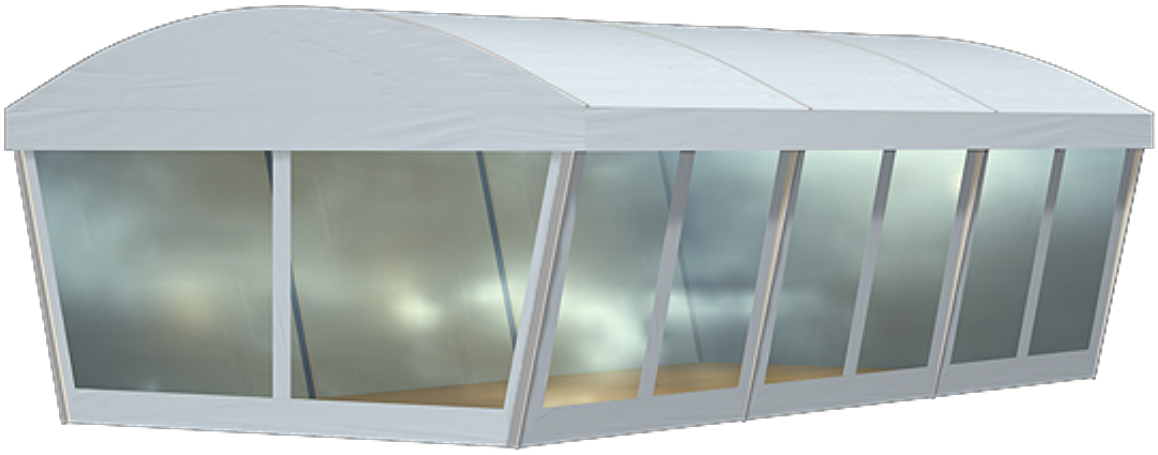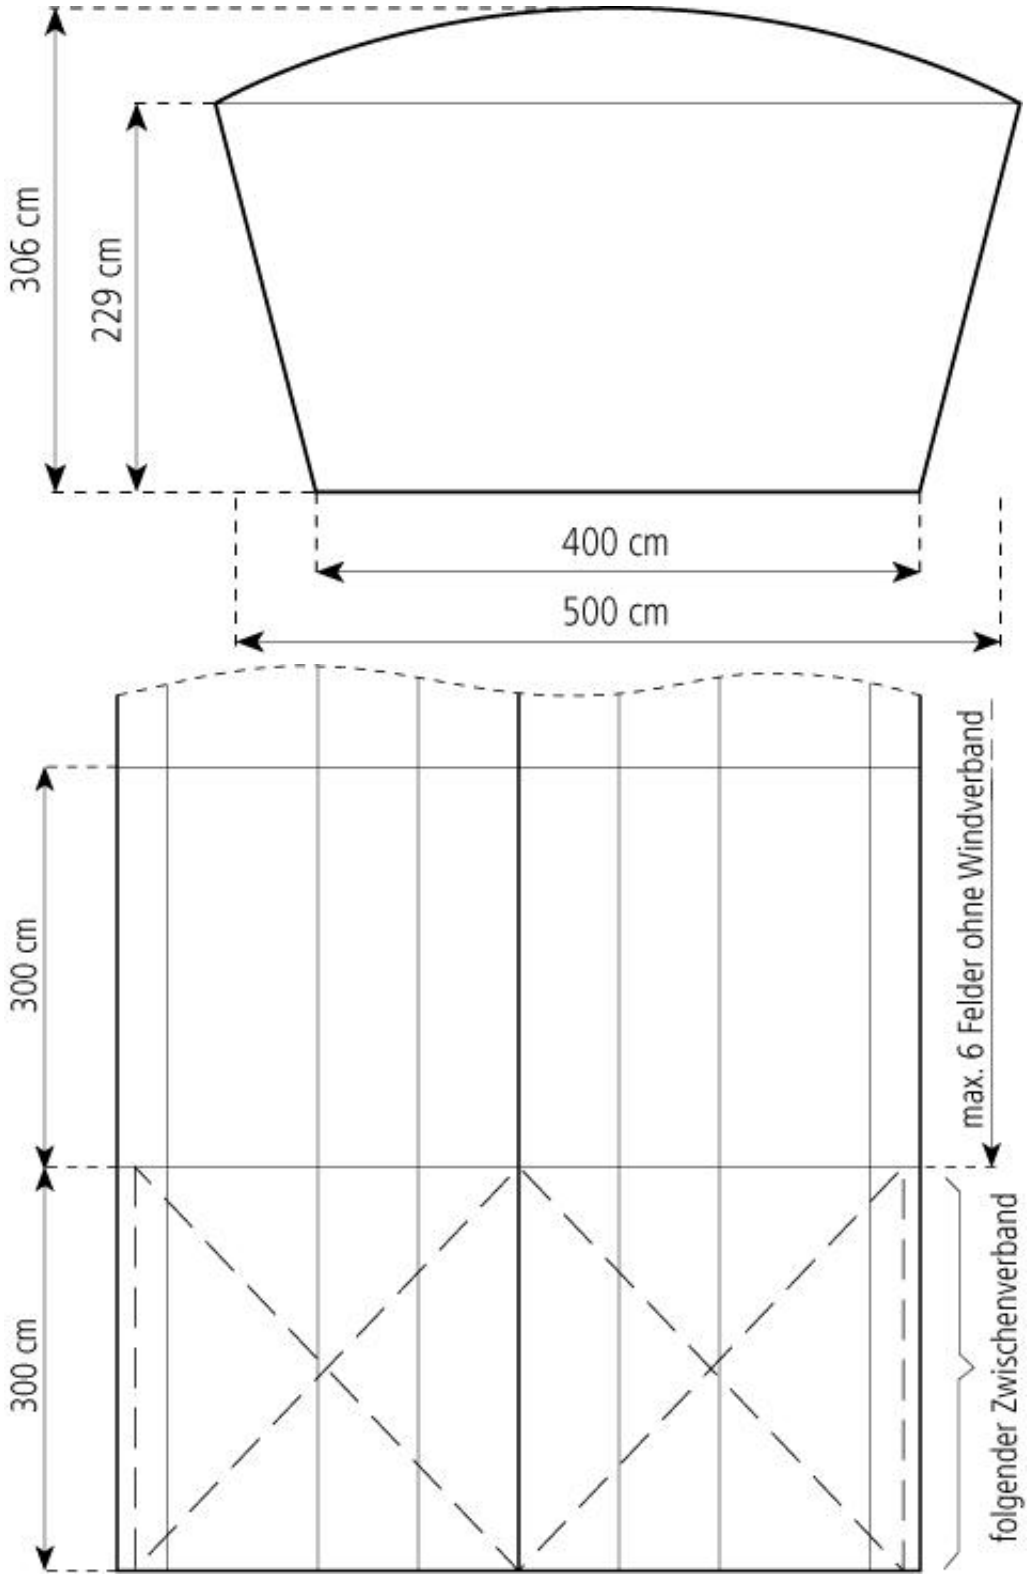

Technical data

| | |
|---|---|
| **Clear-span width** | 400-500 cm |
| **Side height** | 229 cm |
| **Ridge height** | 306 cm |
| **Roof pitch** | 25° |
| **Bay distance** | 300 cm |
| **Longest component** | 479 cm |
| **Minimum tent length** | 600 cm |
| **Maximum tent length** | No limit |
| **Main profile** | 81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm ) |
| **Eave / corner connection** | Internal eave insert |
| **Max. allowed wind speed to DIN** | 80 km/h |
| **Wind Load** | 0.3 kN/m² |
| **Flooring options** | Woodenfloor with timber or steel sub-construction<br>Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor |
| **Cover** | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2 |
| **Special design** | By using compactfloor or woodenfloor with steel sub-construction and weights anchoring can be omitted<br>Portal beams can be used in place of cross struts |

Tent top and side view image


306 cm
229 cm
400 cm
500 cm
300 cm
300 cm
max. 6 Felder ohne Windverband
folgender Zwischenverband