

Tent image

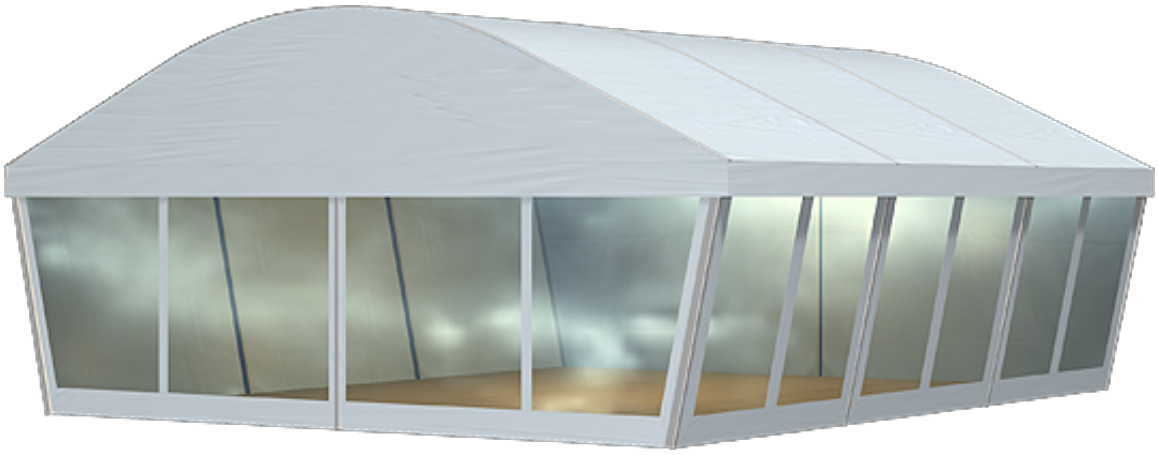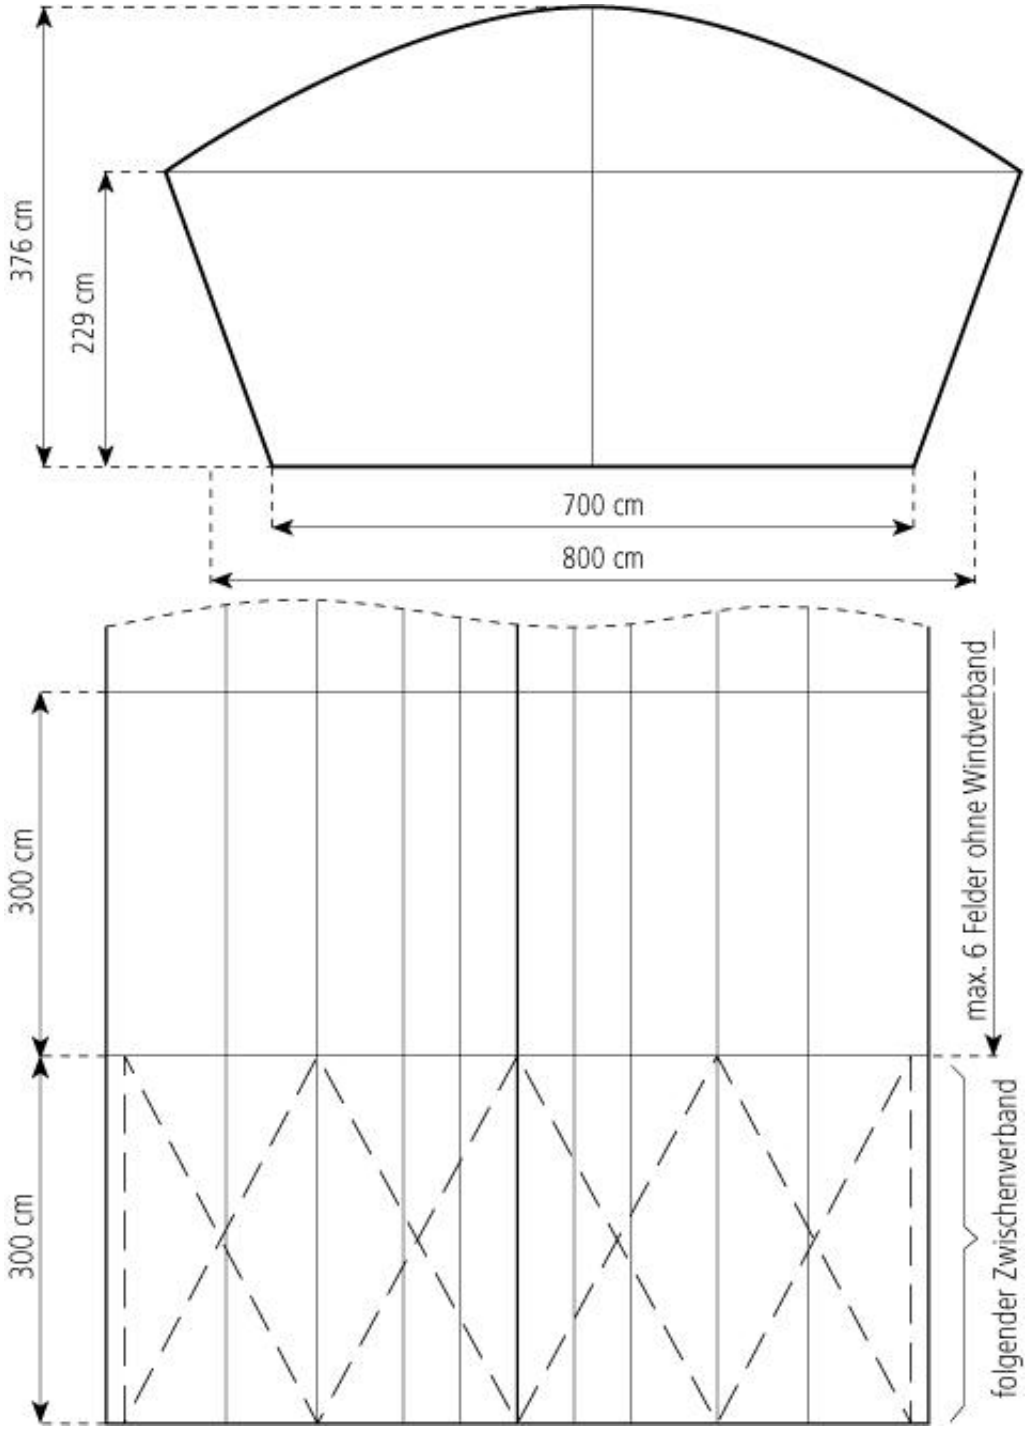

Technical data

Clear-span width	700-800 cm
Side height	229 cm
Ridge height	376 cm
Roof pitch	25°
Bay distance	300 cm
Gable uprights	1 gable upright (per end)
Longest component	406 cm
Minimum tent length	600 cm
Maximum tent length	No limit
Main profile	81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m²
Flooring options	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	By using compactfloor or woodenfloor with steel sub-construction and weights anchoring can be omitted Portal beams can be used in place of cross struts

Tent top and side view image


376 cm
229 cm
700 cm
800 cm
300 cm
300 cm
max. 6 Felder ohne Windverband
folgender Zwischenverband