

## Tent image



## Technical data

Eave / corner connection

Max. allowed wind speed to DIN

**Covered area** 

Wind Load

Clear-span width	500 cm
Side height	225 cm
Side length	250 cm
Ridge height pavilion	306 cm
Ridge height membrane	413 cm
Roof pitch	18°
Longest component Main profile	333 cm 94 mm x 46 mm x 2/4 mm

2025-12-09

Internal eave insert

1/4

16.2 m<sup>2</sup>

80 km/h

 $0.3 \text{ kN/m}^2$ 



Extension / lean-to options

Can also be arranged as a pavilion roof with intermediate bays (see party tents Fiesta 0400/225/290 and

0500/225/306)

Woodenfloor with steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards

Compactfloor

RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2


By using compactfloor anchoring can be omitted

Flooring options

Cover


Special design

Tent top and side view image

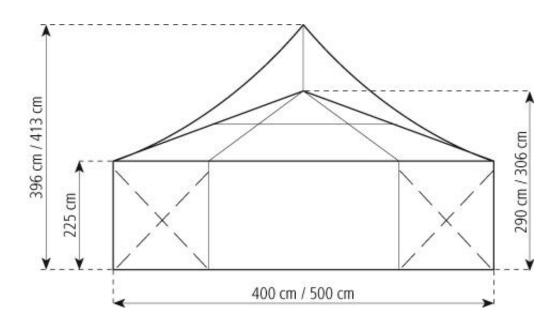

2/4 2025-12-09



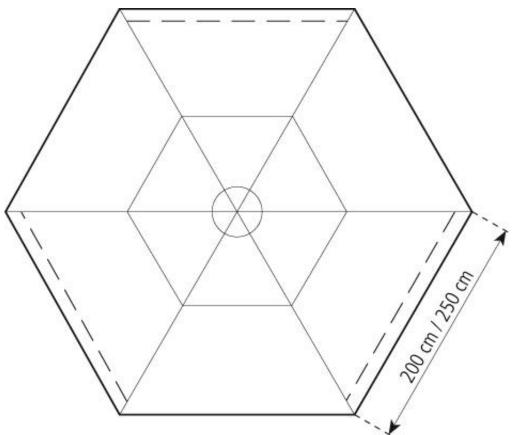

2025-12-09 3/4

## RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



4/4 2025-12-09