

Tent image



Technical data

Clear-span width Side height	300 cm 229 cm
Ridge height	299 cm
Highest point Roof pitch	396 cm 20°
Longest component	300 cm

1/3 2024-05-02

RODER Tent Service (Shanghai) Co., Ltd.

Hotline 400-820-6030, E-Mail: info@roder-china.com



Main profile

Eave / corner connection Extension / lean-to options

Flooring options

Cover

Special design

Note

81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)

Internal eave insert

By using rain gatters can be connected to further tents of the same design in any form and to any length (up to 72 m²)


Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

By using woodenfloor with steel subconstruction and weights anchoring can be omitted

With this type of tent a height balancing adjustment of the beams of ca. 10 cm is possible

Tent top and side view image

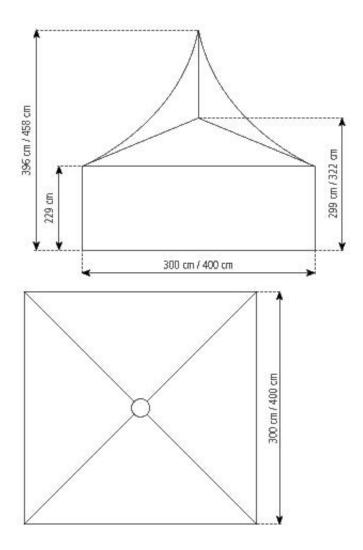

2024-05-02 2/3

RODER Tent Service (Shanghai) Co., Ltd. Hotline 400-820-6030, E-Mail: info@roder-china.com



3/3 2024-05-02