


Tent image

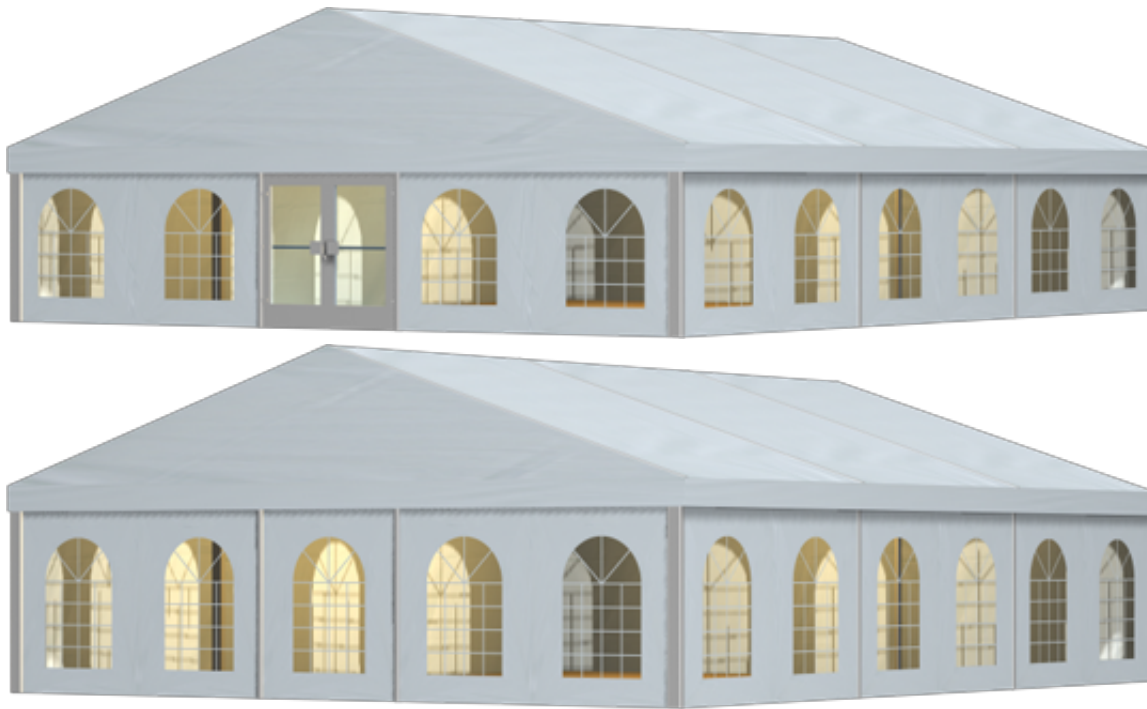

#### Technical data

<b>Clear-span width</b>	1200 cm
<b>Side height</b>	240 cm, 300 cm
<b>Ridge height</b>	460 cm, 520 cm
<b>Roof pitch</b>	20°
<b>Bay distance</b>	500 cm
<b>Gable uprights</b>	2 gable uprights (per end)
<b>Longest component</b>	660 cm
<b>Minimum tent length</b>	1000 cm
<b>Maximum tent length</b>	No limit
<b>Main profile</b>	160 mm x 100 mm x 3 mm
<b>Eave / corner connection</b>	Slide connection
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	Extension (max. span 300 cm and 4 bays, located anywhere, not both sides)
<b>Flooring options</b>	Wooden floor with timber or steel sub-construction Aluminium cassette floor with plywood or full aluminium boards Compact floor
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame

**Special design**

retardant to DIN 4102 B1, M2  
By using compactfloor anchoring can be omitted

Tent top and side view image

