


## Tent image

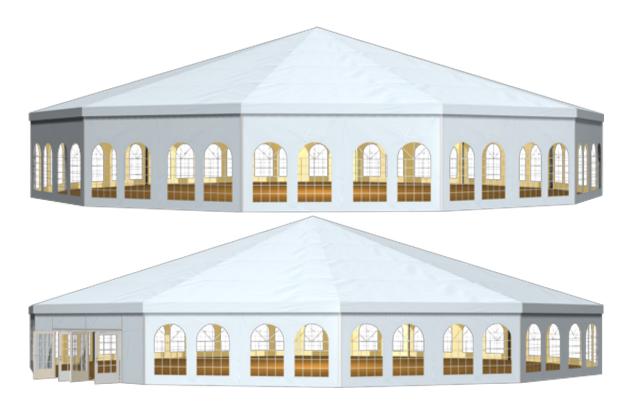

## Technical data

Clear-span width Side height Ridge height Side length Roof pitch

Bay distance
Main profile
Eave / corner connection
Covered area
Max. allowed wind speed to DIN
Wind Load
Extension / lean-to options

Flooring options

Cover

3000 cm 300 cm, 400 cm 787 cm, 887 cm 776 cm 18°

1064 cm
250 mm x 120 mm x 5/4 mm
Clevic-plate connection with corner strut
675 m²
100 km/h, 130 km/h
0.5 kN/m², 0.8 kN/m²
Can also be arranged with intermediate bays (see big tents 3000/300/787 and 3000/400/887)
Aluminium cassettefloor with plywood or full


aluminiumboards RÖDER No. 1: PVC-coated polyester textile, flame

retardant to DIN 4102 B1, M2

2024-05-19 1 / 2



Tent top and side view image

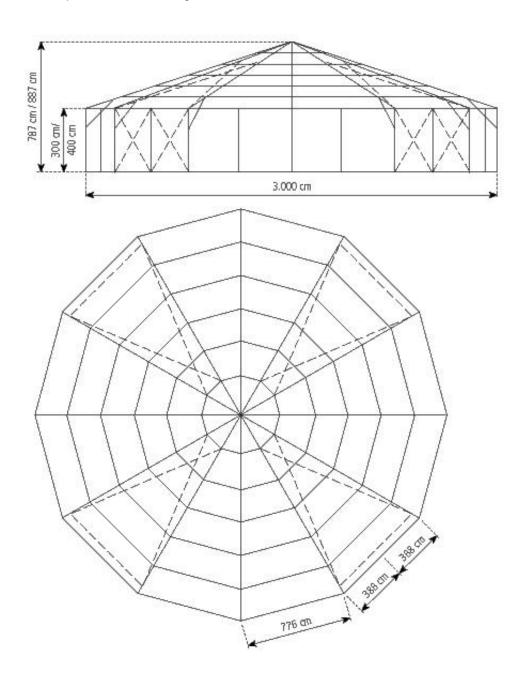

2/2 2024-05-19