


Tent image

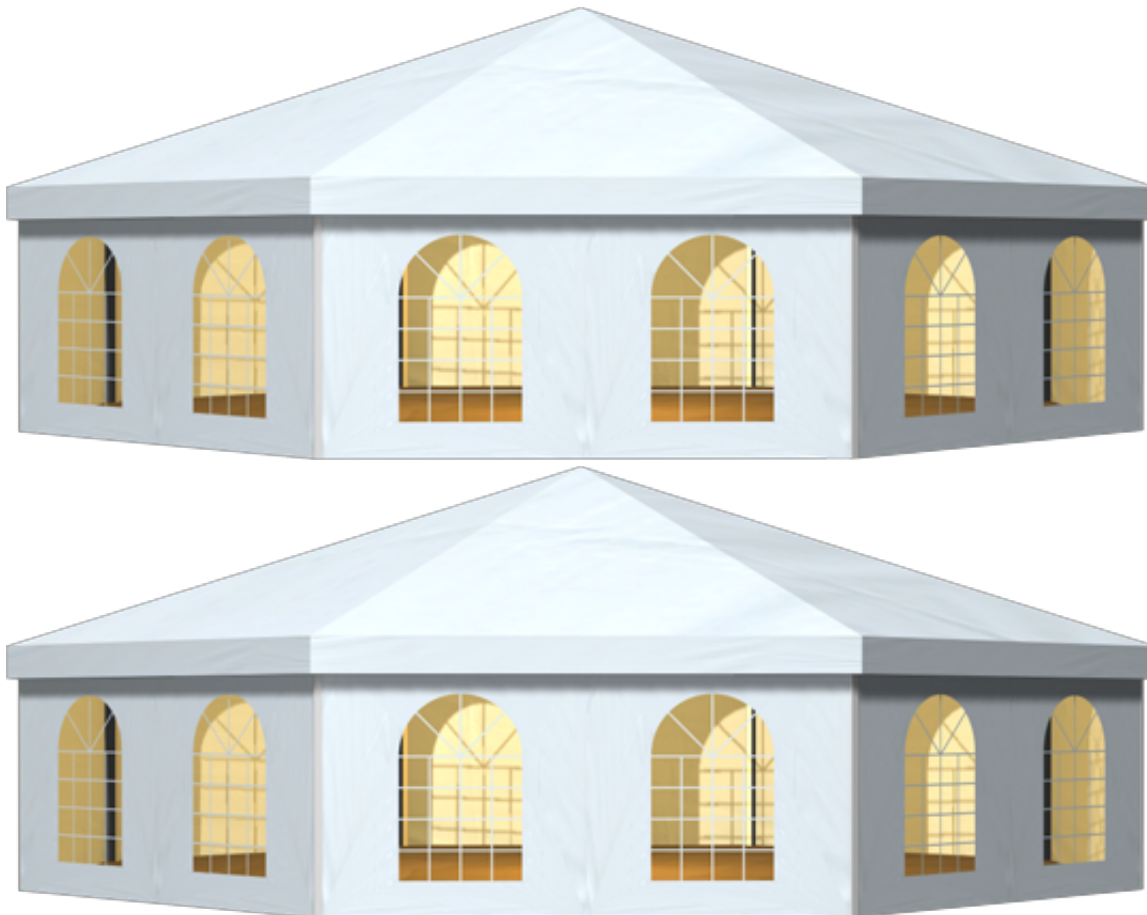

Technical data

| | |
|---------------------------------------|---|
| Clear-span width | 1500 cm |
| Side height | 240 cm, 300 cm |
| Ridge height | 480 cm, 540 cm |
| Side length | 574 cm |
| Roof pitch | 18° |
| Longest component | 790 cm |
| Main profile | 220 mm x 100 mm x 3 mm |
| Eave / corner connection | Slide connection |
| Covered area | 159 m ² |
| Max. allowed wind speed to DIN | 100 km/h |
| Wind Load | 0.5 kN/m ² |
| Extension / lean-to options | Can also be arranged with intermediate bays (see big tents 1500/240/480 and 1500/300/540) |
| Flooring options | Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor |
| Cover | RÖDER No. 1: PVC-coated polyester textile, flame |

Special design

retardant to DIN 4102 B1, M2
By using compactfloor anchoring can be omitted

Tent top and side view image

