


Tent image

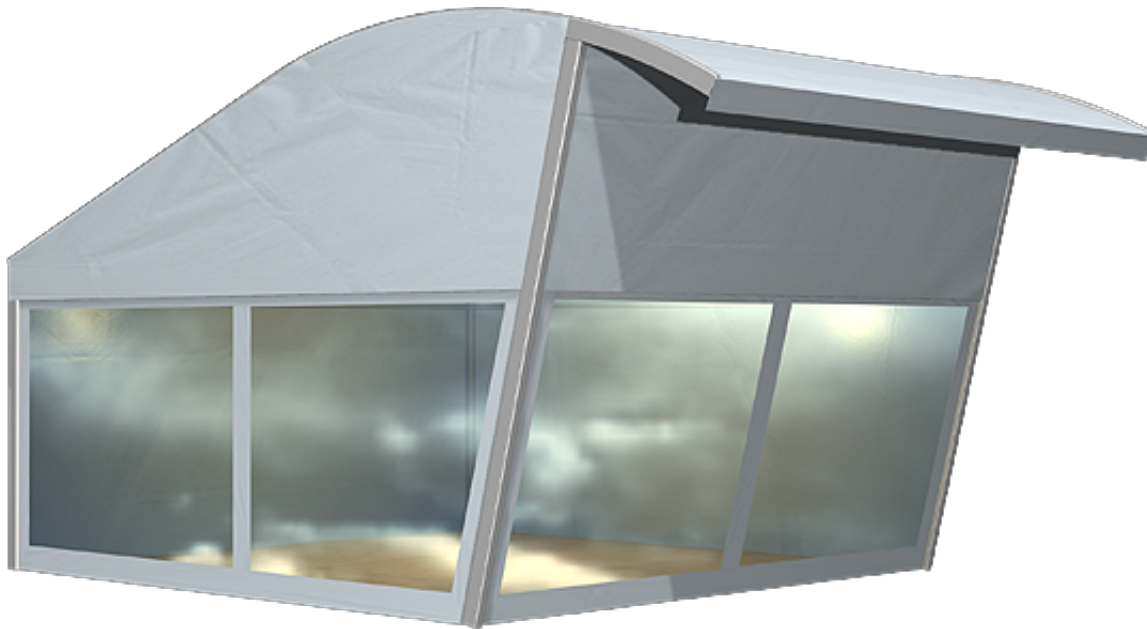

#### Technical data

|                                       |                                                                                                                                   |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Clear-span width</b>               | 500 cm                                                                                                                            |
| <b>Side height</b>                    | 240 cm                                                                                                                            |
| <b>Ridge height</b>                   | 395 cm                                                                                                                            |
| <b>Roof pitch</b>                     | 25°                                                                                                                               |
| <b>Bay distance</b>                   | 500 cm                                                                                                                            |
| <b>Longest component</b>              | 556 cm                                                                                                                            |
| <b>Minimum tent length</b>            | 500 cm                                                                                                                            |
| <b>Maximum tent length</b>            | No limit                                                                                                                          |
| <b>Main profile</b>                   | 130 mm x 70 mm x 3 mm                                                                                                             |
| <b>Eave / corner connection</b>       | Internal eave insert                                                                                                              |
| <b>Max. allowed wind speed to DIN</b> | 80 km/h                                                                                                                           |
| <b>Wind Load</b>                      | 0.3 kN/m <sup>2</sup>                                                                                                             |
| <b>Flooring options</b>               | Woodenfloor with timber or steel sub-construction<br>Aluminium cassettefloor with plywood or full aluminiumboards<br>Compactfloor |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2                                                     |
| <b>Special design</b>                 | Portal beams can be used in place of cross struts<br>By using compactfloor anchoring can be omitted                               |

Tent top and side view image

