


Tent image

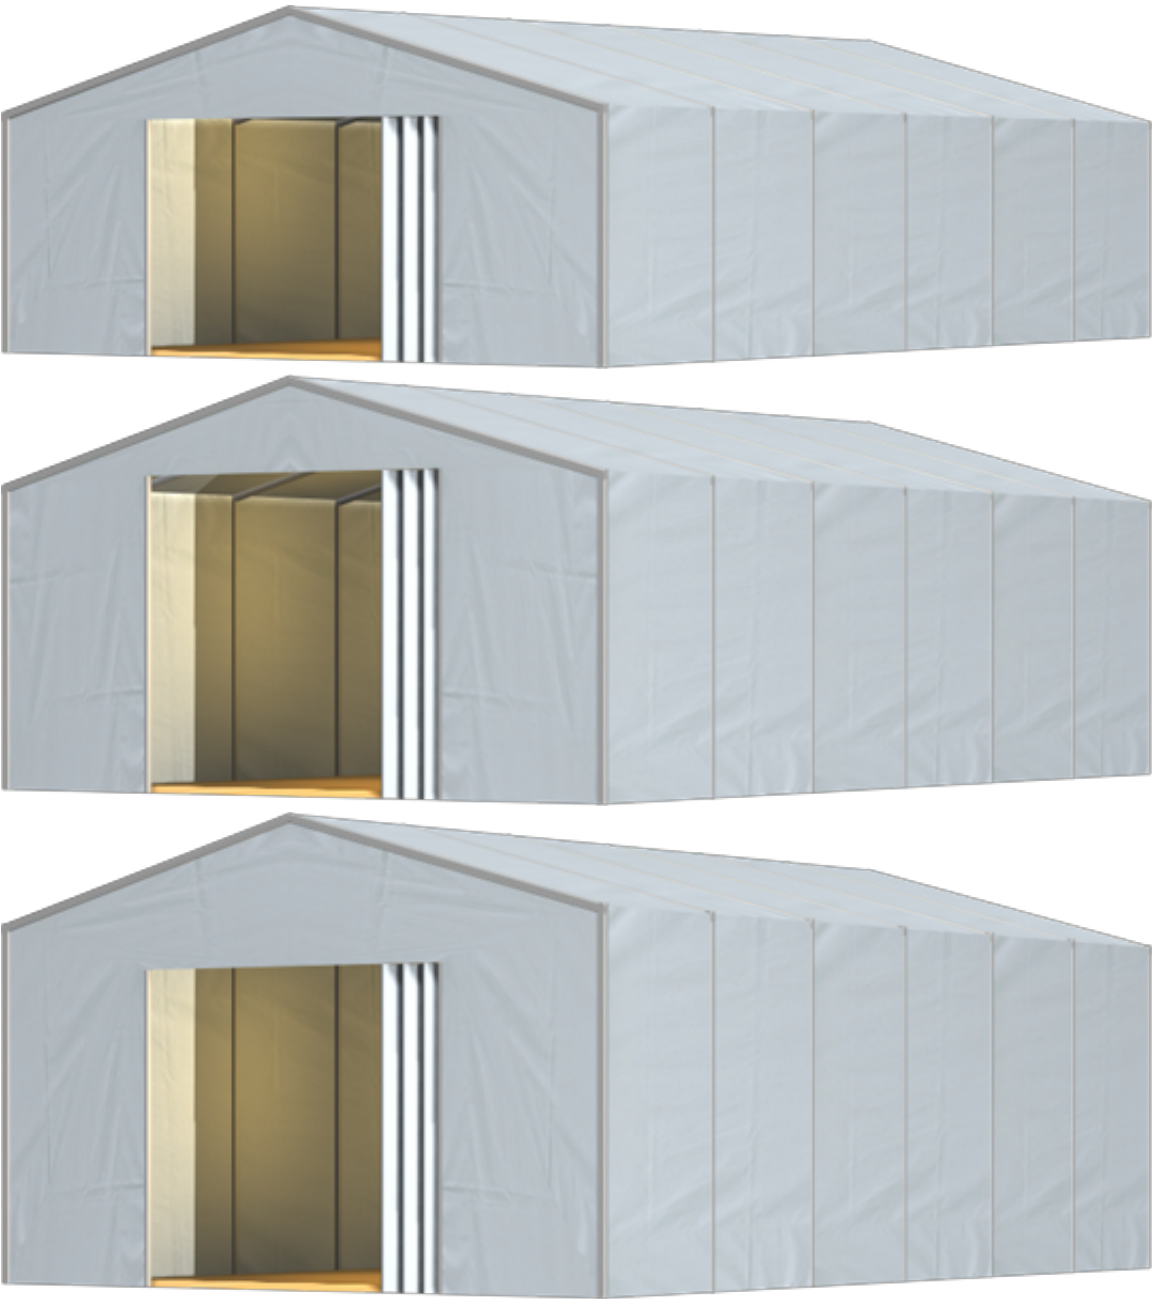

Technical data

Clear-span width	1000 cm
Side height	350 cm, 440cm, 500cm
Ridge height	484 cm, 574cm, 643cm
Roof pitch	15°

Bay distance	250 cm
Gable uprights	2 gable uprights (per end)
Longest component	524 cm, 526cm, 552cm
Minimum tent length	500 cm, 750cm
Maximum tent length	No limit
Main profile	130 mm x 88 mm x 3 mm, 170 mm x 88 mm x 3 mm
Door sizes (PVC door panels)	Side wall 220 cm / 450 cm x 300 cm Gable end 450 cm x 390 cm, Side wall 220 cm / 450 cm x 390 cm Gable end 450 cm x 430 cm, Side wall 220 cm / 450 cm x 450 cm Gable end 450 cm x 430 cm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	80 km/h, 100 km/h
Wind Load	0.3 kN/m ² , 0.5 kN/m ²
Snow load	0.25 (0.75) kN/m ² , 0.25 kN/m ²
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	Also available in fold-up version Sliding doors, rolling doors or service entrances Trapezoidal metal sheets Snow load 0.25 kN/m ² : Movable system on rollers

Tent top and side view image

