


Tent image

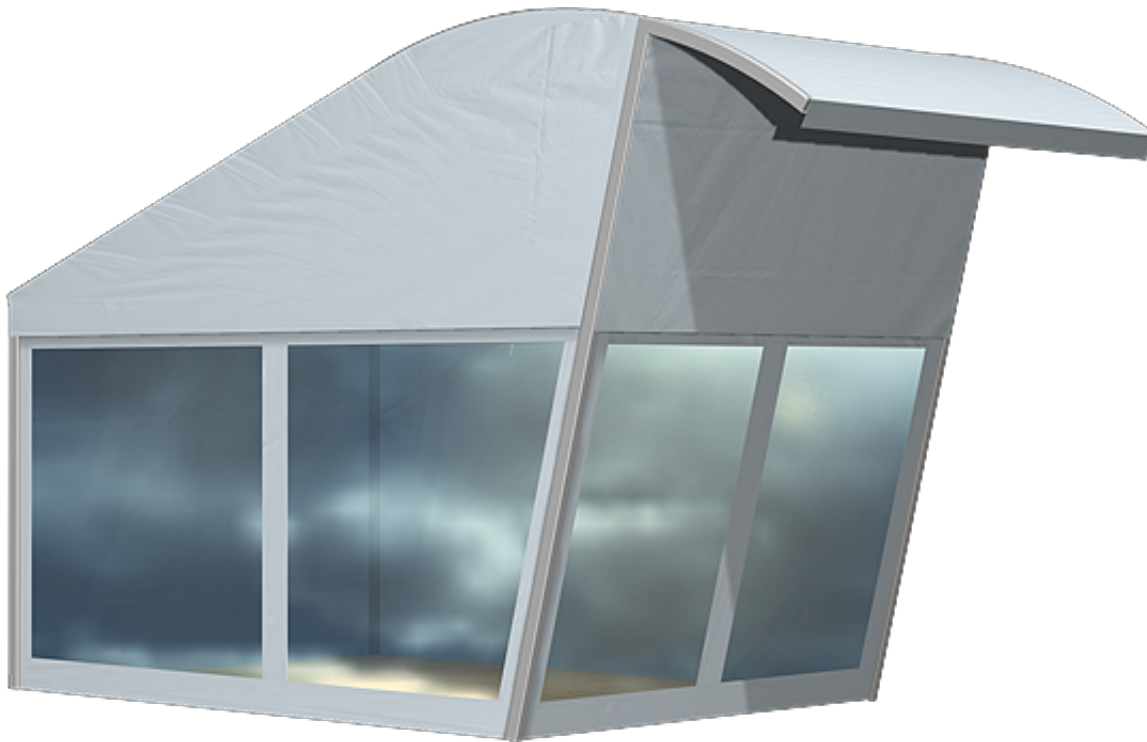

Technical data

|                                       |                                                                                                                                       |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>Clear-span width</b>               | 400 cm                                                                                                                                |
| <b>Side height</b>                    | 229 cm                                                                                                                                |
| <b>Ridge height</b>                   | 373 cm                                                                                                                                |
| <b>Roof pitch</b>                     | 25°                                                                                                                                   |
| <b>Bay distance</b>                   | 300 cm                                                                                                                                |
| <b>Longest component</b>              | 432 cm                                                                                                                                |
| <b>Minimum tent length</b>            | 300 cm                                                                                                                                |
| <b>Maximum tent length</b>            | No limit                                                                                                                              |
| <b>Main profile</b>                   | 81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm )                                                                                 |
| <b>Eave / corner connection</b>       | Internal eave insert                                                                                                                  |
| <b>Max. allowed wind speed to DIN</b> | 80 km/h                                                                                                                               |
| <b>Wind Load</b>                      | 0.3 kN/m <sup>2</sup>                                                                                                                 |
| <b>Flooring options</b>               | Wooden floor with timber or steel sub-construction<br>Aluminium cassette floor with plywood or full aluminium boards<br>Compact floor |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2                                                         |

**Special design**

Portal beams can be used in place of cross struts By  
using compactfloor anchoring can be omitted

Tent top and side view image

