


Tent image

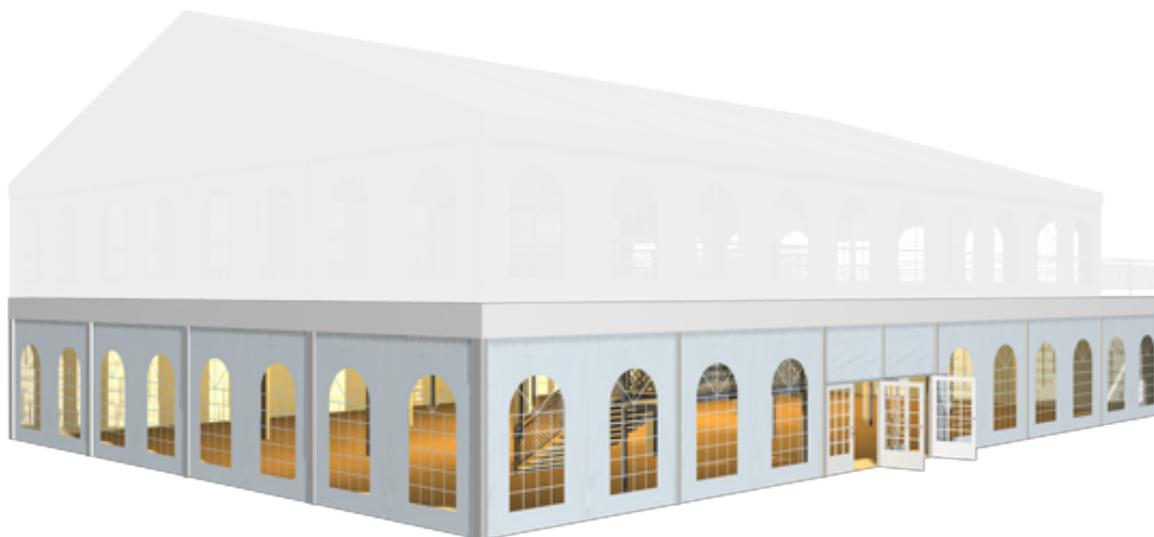

Technical data

<b>Clear-span width</b>	1000-3000 cm
<b>Side height</b>	415 cm
<b>Bay distance</b>	500 cm
<b>Main profile</b>	285 mm x 124 mm x 5.2 mm
<b>Working load on platform</b>	500 kg/m <sup>2</sup>
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	Can be extended to any length in certain variants
<b>Flooring options</b>	Woodenfloor with timber or steel sub-construction Heavy-flooringsystem without anchoring Aluminium cassette floor with full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
<b>Note</b>	The types of tent which are erected on the bi-level tent must be viewed separately
<b>Possible utilization</b>	2nd level can be completely or partially covered, or used as a terrace

Tent top and side view image

