


Tent image

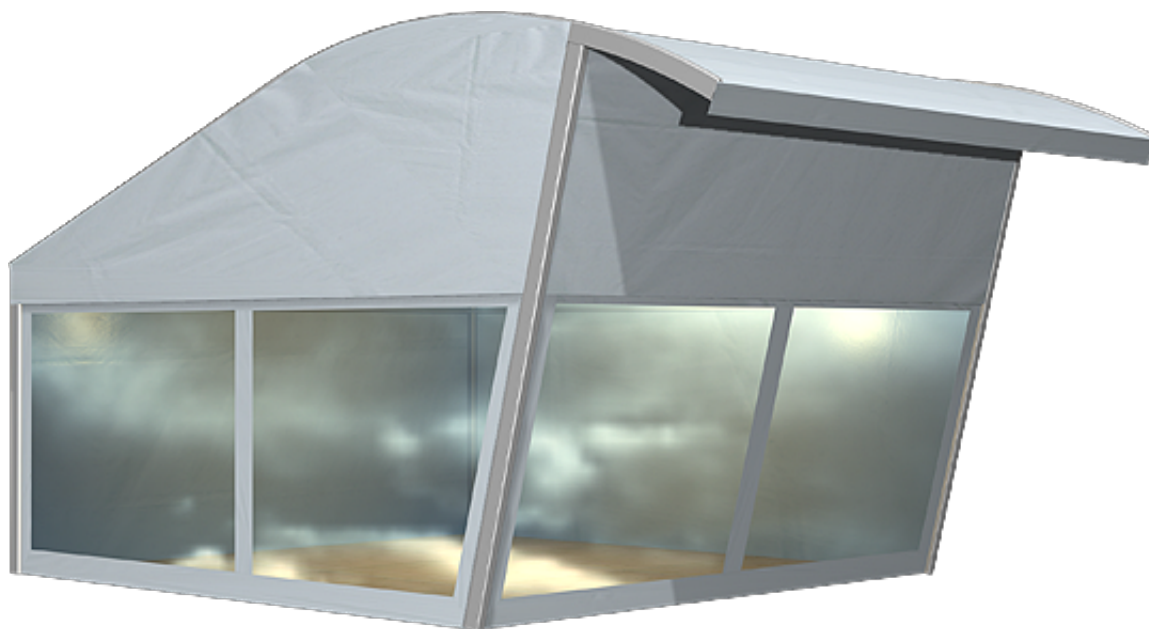

Technical data

Clear-span width	500 cm
Side height	240 cm
Ridge height	395 cm
Roof pitch	25°
Bay distance	500 cm
Longest component	556 cm
Minimum tent length	500 cm
Maximum tent length	No limit
Main profile	130 mm x 70 mm x 3 mm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	80 km/h
Wind Load	0.3 kN/m ²
Flooring options	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	Portal beams can be used in place of cross struts By using compactfloor anchoring can be omitted

Tent top and side view image

