


Tent image

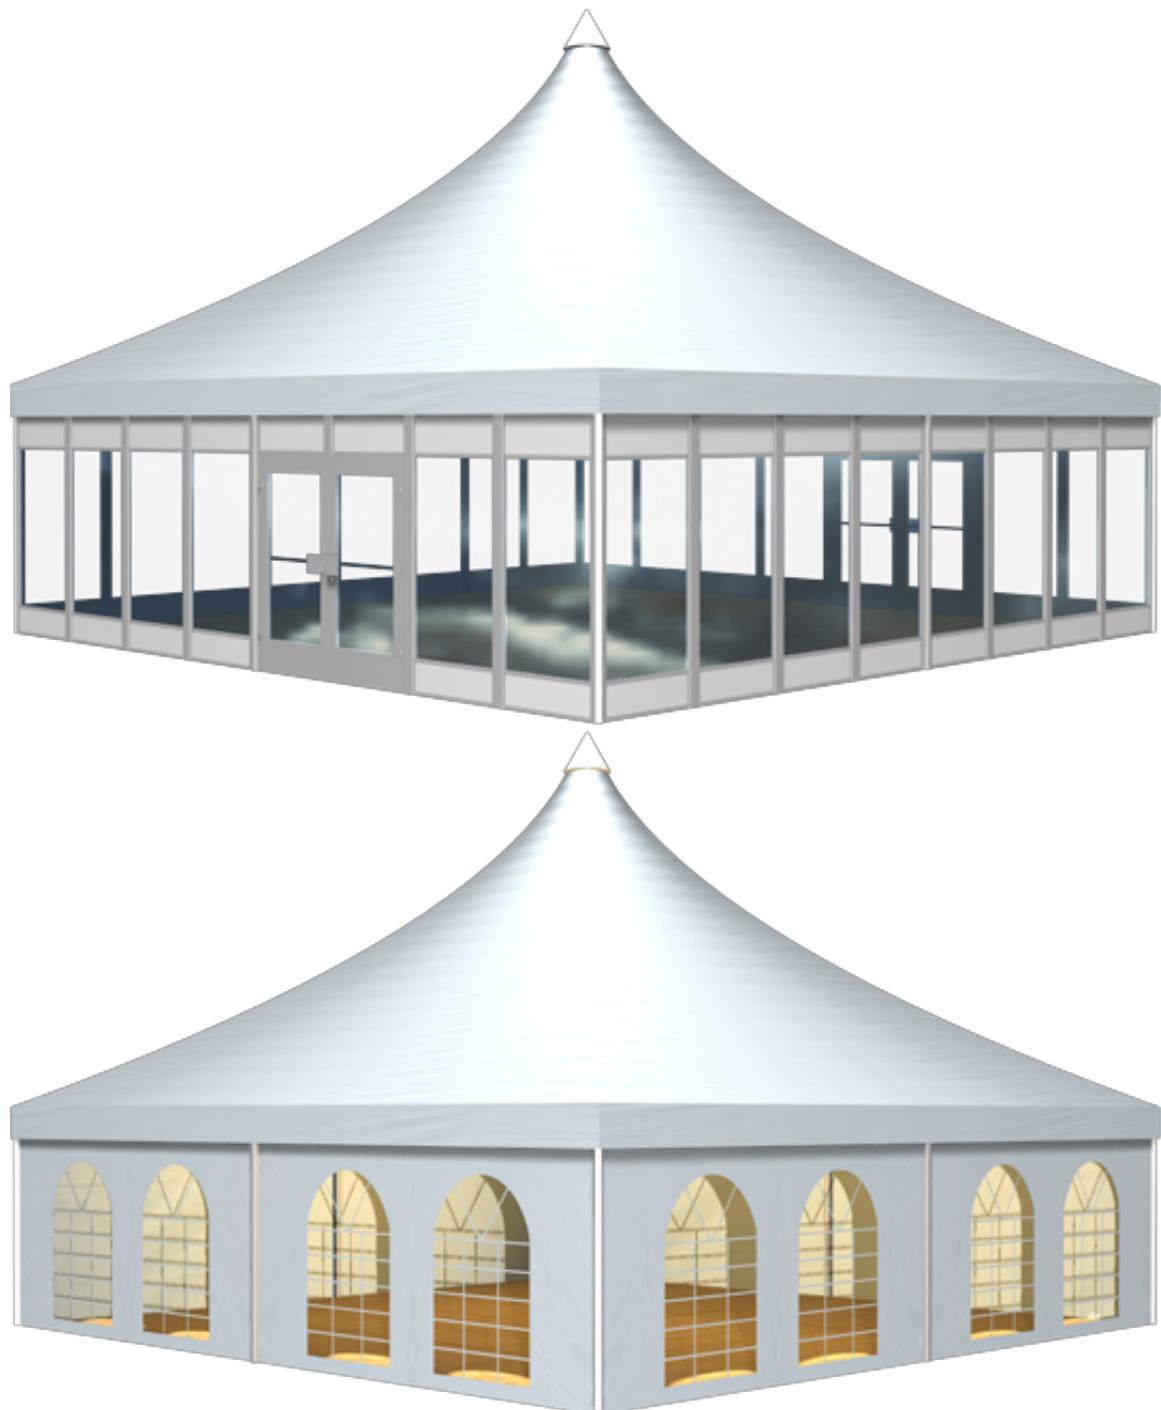

Technical data

**Clear-span width**  
**Side height**

974 cm  
250cm, 300 cm

<b>Ridge height</b>	780cm, 830 cm
<b>Longest component</b>	550 cm
<b>Main profile</b>	116 mm x 116 mm x 3 mm
<b>Eave / corner connection</b>	Internal eave insert
<b>Covered area</b>	100 m <sup>2</sup>
<b>Max. allowed wind speed to DIN</b>	100 km/h
<b>Wind Load</b>	0.5 kN/m <sup>2</sup>
<b>Extension / lean-to options</b>	By using rain gutters can be connected to further tents of the same design in any form and to any length
<b>Flooring options</b>	Aluminium cassettefloor with plywood or full aluminiumboards
<b>Cover</b>	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

