

Tent image

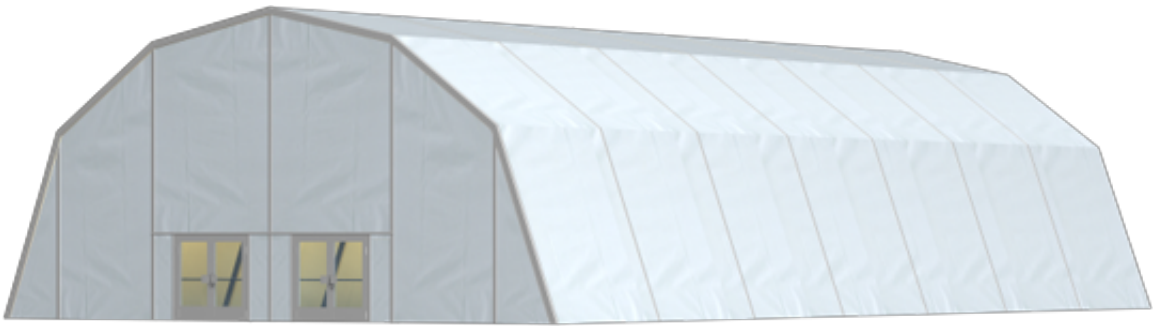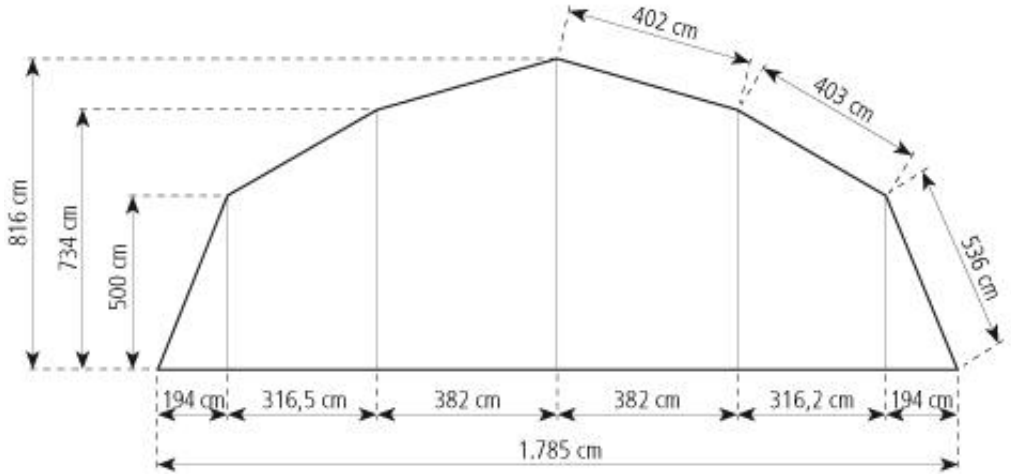

Technical data

Clear-span width	1800 cm
Side height	500 cm
Ridge height	861 cm
Bay distance	515 cm
Gable uprights	5 gable uprights (per end)
Longest component	780 cm
Minimum tent length	3090 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 4 mm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m²
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image


402 cm
403 cm
536 cm
816 cm
734 cm
500 cm
194 cm
316,5 cm
382 cm
382 cm
316,2 cm
194 cm
1.785 cm