


Tent image

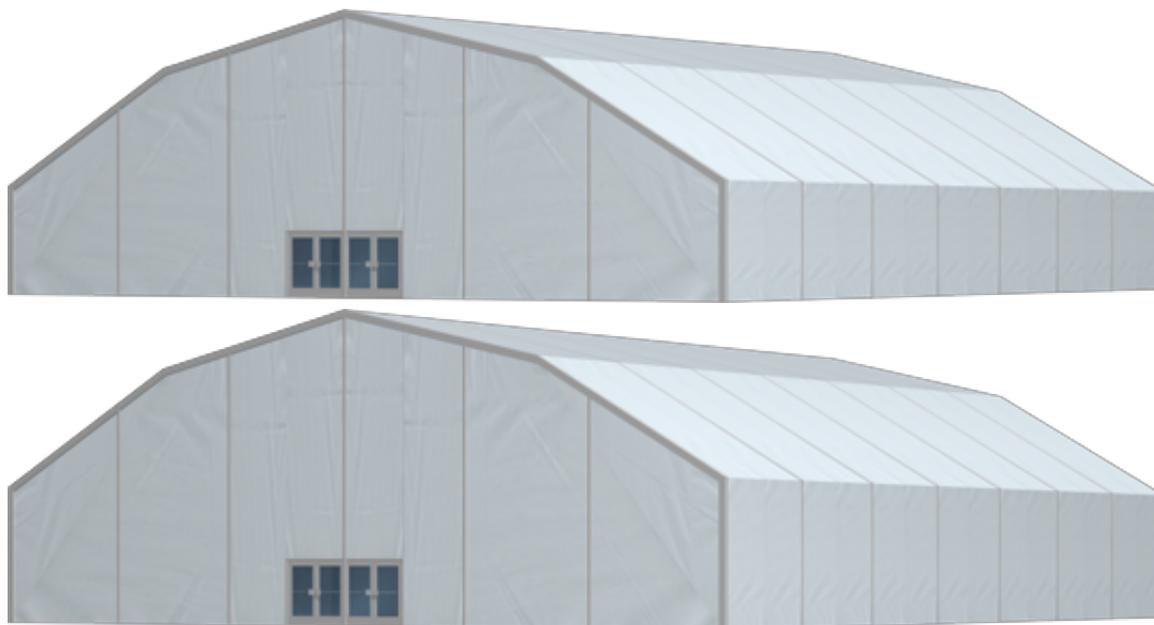

Technical data

| | |
|---------------------------------------|--|
| Clear-span width | 3000 cm |
| Side height | 400 cm, 500cm |
| Ridge height | 1050 cm, 1097cm |
| Bay distance | 500 cm |
| Gable uprights | 5 gable uprights (per end) |
| Longest component | 856cm |
| Minimum tent length | 2000 cm |
| Maximum tent length | No limit |
| Main profile | 285 mm x 124 mm x 7.5/5.2 mm |
| Eave / corner connection | Internal eave insert |
| Max. allowed wind speed to DIN | 130 km/h |
| Wind Load | 0.8 kN/m ² |
| Flooring options | Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards |
| Cover | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2 |

Tent top and side view image

