
Tent image



Technical data

Clear-span width	3600 cm
Side height	646 cm
Ridge height	1377 cm
Bay distance	320 cm / 515 cm
Gable uprights	9 gable uprights (per end)
Longest component	856 cm
Minimum tent length	3200 cm / 3605 cm
Maximum tent length	No limit
Main profile	285 mm x 124 mm x 7.5/5.2 mm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	130 km/h
Wind Load	0.8 kN/m²
Flooring options	Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Tent top and side view image

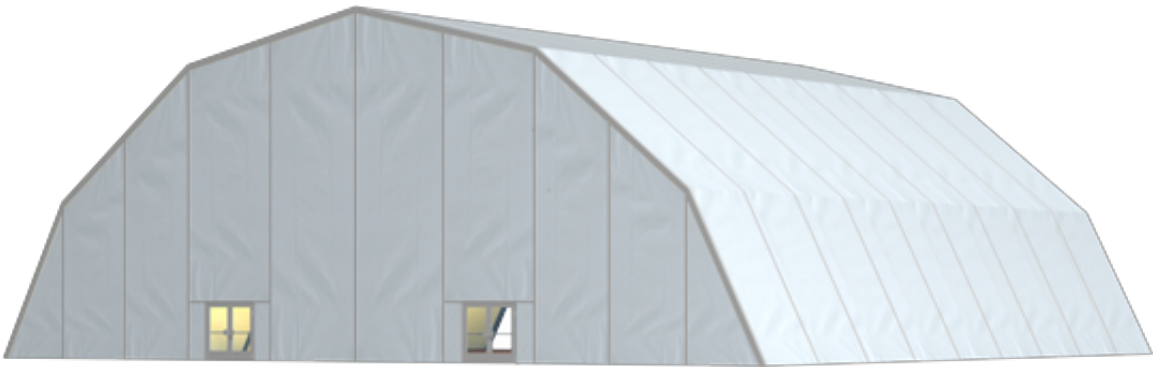