


Tent image

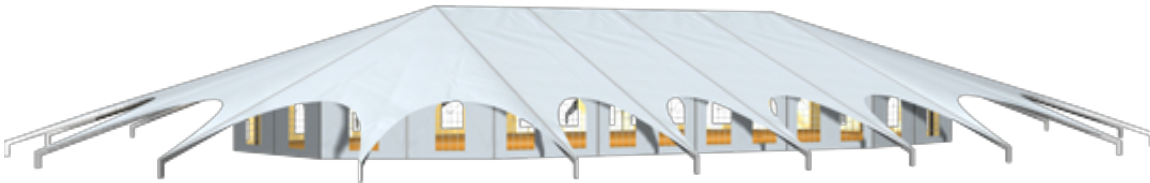

Technical data

|                                       |                                                                               |
|---------------------------------------|-------------------------------------------------------------------------------|
| <b>Main ship clear-span width</b>     | 2000-4000 cm                                                                  |
| <b>Total clear-span width</b>         | 4050 cm                                                                       |
| <b>Main ship side height</b>          | 400 cm                                                                        |
| <b>Ridge height</b>                   | 720 cm                                                                        |
| <b>Roof pitch</b>                     | 18°                                                                           |
| <b>Bay distance</b>                   | 500 cm                                                                        |
| <b>Gable uprights</b>                 | 3 gable uprights (per end)                                                    |
| <b>Longest component</b>              | 1100 cm                                                                       |
| <b>Minimum tent length</b>            | According to design                                                           |
| <b>Maximum tent length</b>            | No limit                                                                      |
| <b>Main profile</b>                   | 250 mm x 120 mm x 5/4 mm                                                      |
| <b>Max. allowed wind speed to DIN</b> | 100 km/h                                                                      |
| <b>Wind Load</b>                      | 0.5 kN/m <sup>2</sup>                                                         |
| <b>Variations</b>                     | 1/2 octagonal at gable end                                                    |
| <b>Flooring options</b>               | Aluminium cassettefloor with plywood or full aluminiumboards                  |
| <b>Cover</b>                          | RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2 |

Tent top and side view image

