
Tent image

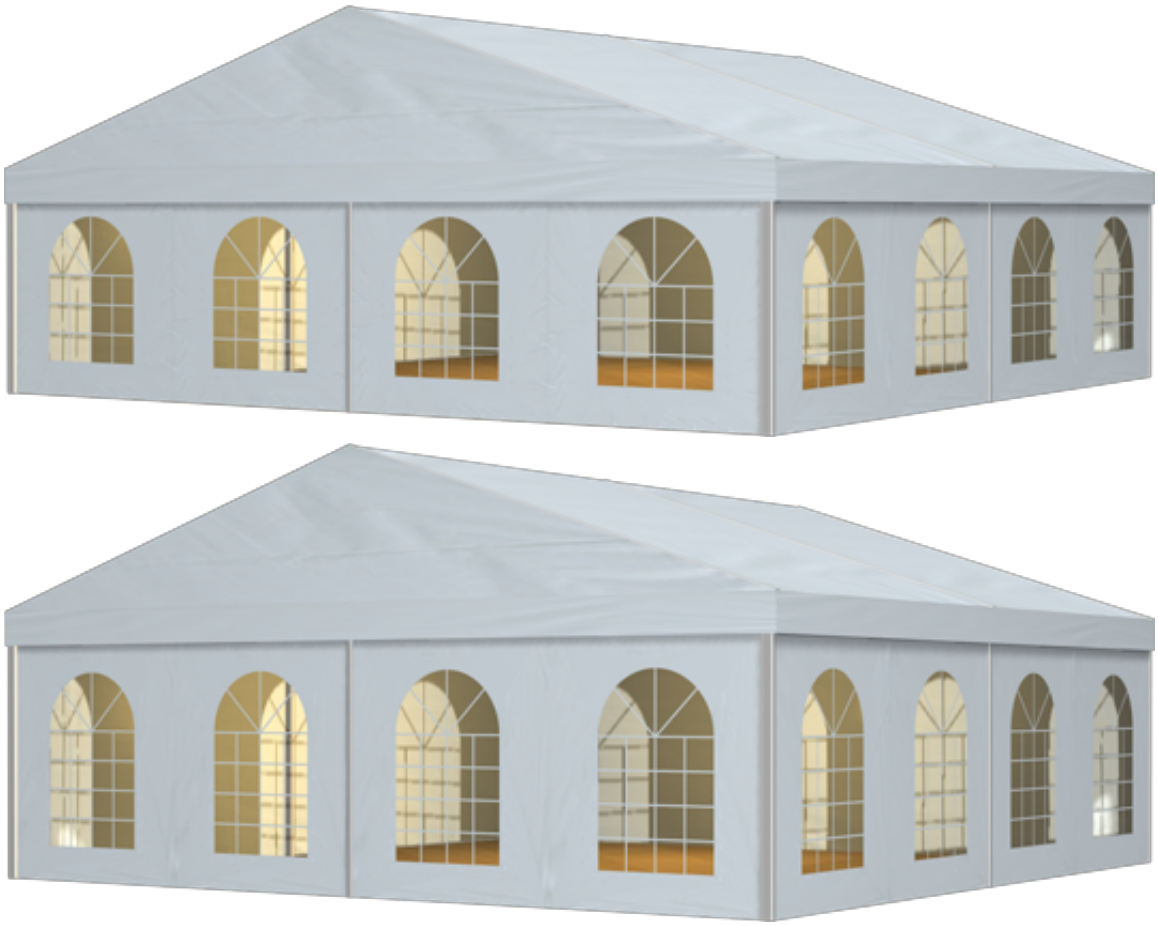

Technical data

Clear-span width	1000 cm
Side height	240 cm, 300 cm
Ridge height	422 cm, 482 cm
Roof pitch	20°
Bay distance	500 cm
Gable uprights	1 gable upright (per end)
Longest component	538 cm
Minimum tent length	1000 cm
Maximum tent length	No limit
Main profile	130 mm x 70 mm x 3 mm
Eave / corner connection	Internal eave insert
Max. allowed wind speed to DIN	100 km/h
Wind Load	0.5 kN/m²
Extension / lean-to options	Extension (max. span 300 cm located anywhere, both sides, any length), 1/2 octagonal with intermediate bays,

	one or both sides with Giga tents
Flooring options	Woodenfloor with timber or steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor
Cover	RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2
Special design	Portal beams can be used in place of cross struts By using compactfloor anchoring can be omitted

Tent top and side view image

