


Tent image

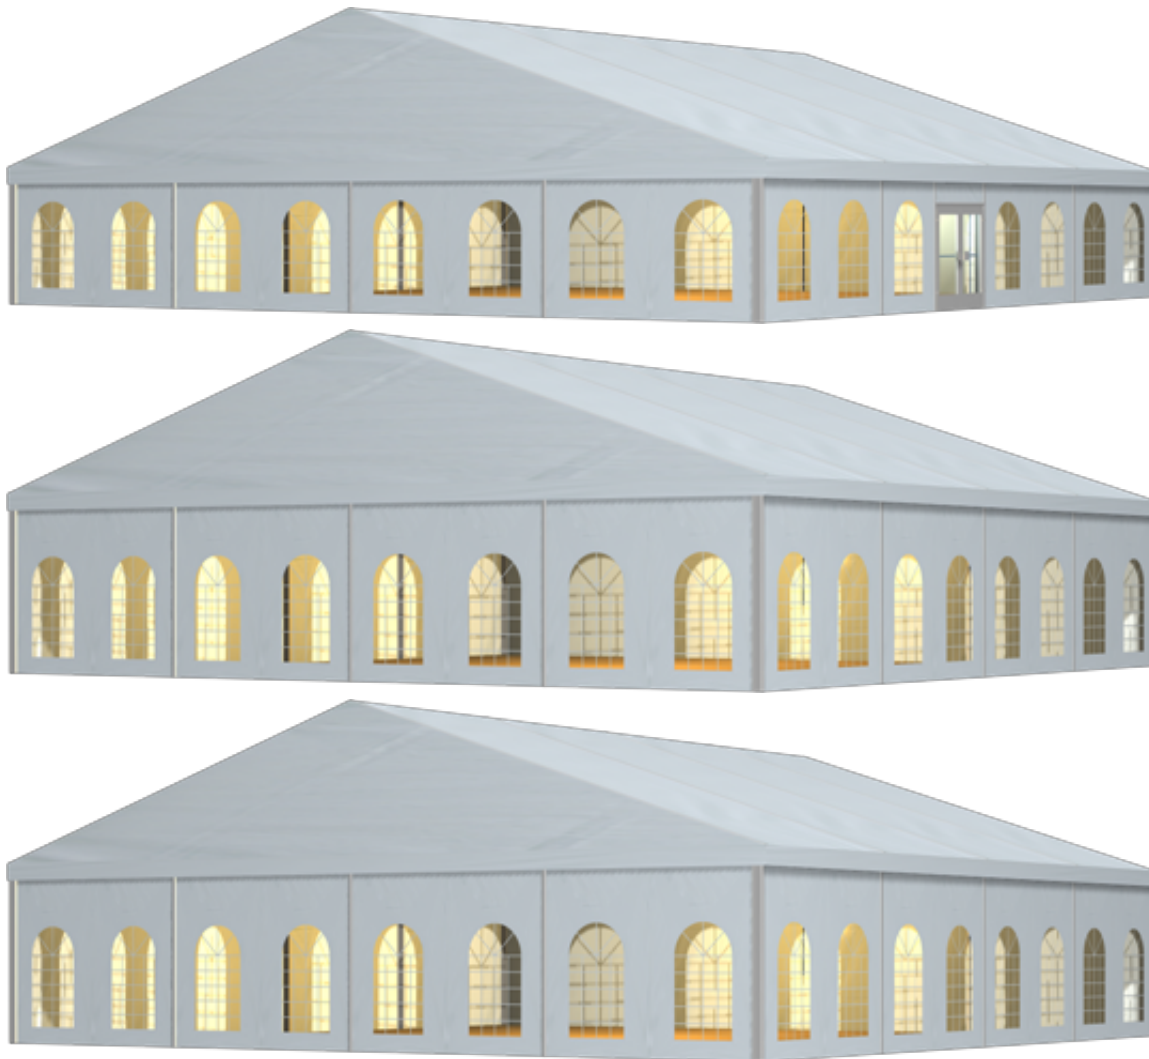

Technical data

Clear-span width	2000 cm
Side height	240 cm, 300 cm, 400 cm
Ridge height	565 cm, 625 cm, 725 cm
Roof pitch	18°
Bay distance	500 cm
Gable uprights	3 gable uprights (per end)
Longest component	1070 cm
Minimum tent length	2000 cm
Maximum tent length	No limit
Main profile	220 mm x 100 mm x 3 mm, 220 mm x 100 mm x 4 mm
Eave / corner connection	Slide connection with ridge strut, Twin-pin connection

Max. allowed wind speed to DIN

Wind Load

Extension / lean-to options

Flooring options

Cover

Special design

with corner and ridge strut

100 km/h

0.5 kN/m²

Extension (max. span 400 cm, located anywhere, both sides, any length), Extension (max. span 400 cm, located anywhere, both sides, any length) 1/2 octagonal at gable end

Woodenfloor with timber or steel sub-construction

Aluminium cassettefloor with plywood or full aluminiumboards Compactfloor, Woodenfloor with timber and steel sub-construction Aluminium cassettefloor with plywood or full aluminiumboards

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Spars with site joints permit the construction of a 15 m tent with the same frame components By using compactfloor anchoring can be omitted, Portal beams can be used in place of cross struts

Tent top and side view image

